


4

3

2


1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-		B	REVISED	18DEC2012	H.M

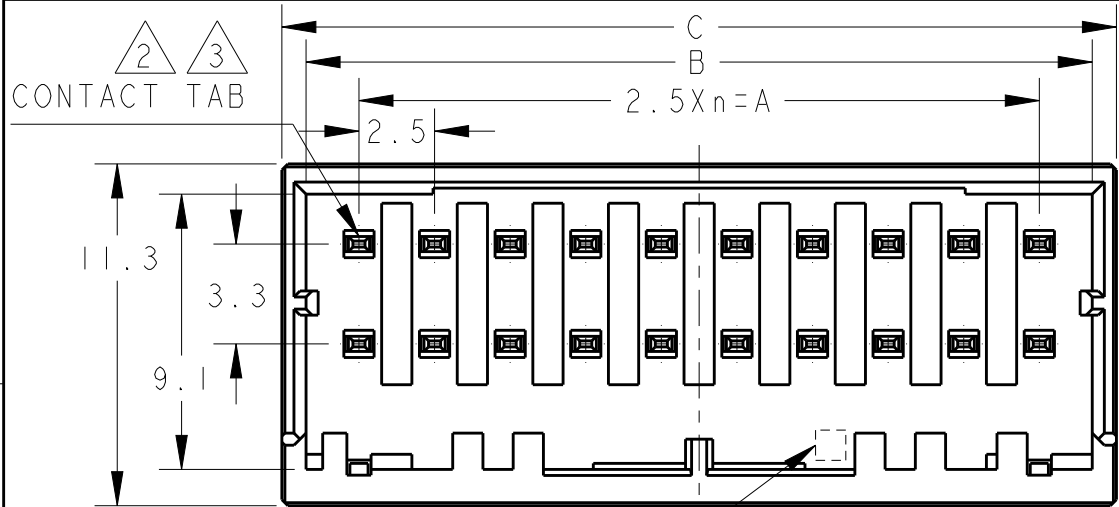



1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂(94V-0)、色:黒
コンタクト:銅合金
リテンションレグ:錫めっき銅合金

2. めっき:全面:ニッケル下地めっき1.27μm以上
3. めっき:接触部 2の上に金めっき0.38μm以上
4. めっき:コンタクト半田付部: 2の上に錫めっき2μm以上
5. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。
6. Y KEY形状は、X KEY形状と左右対称

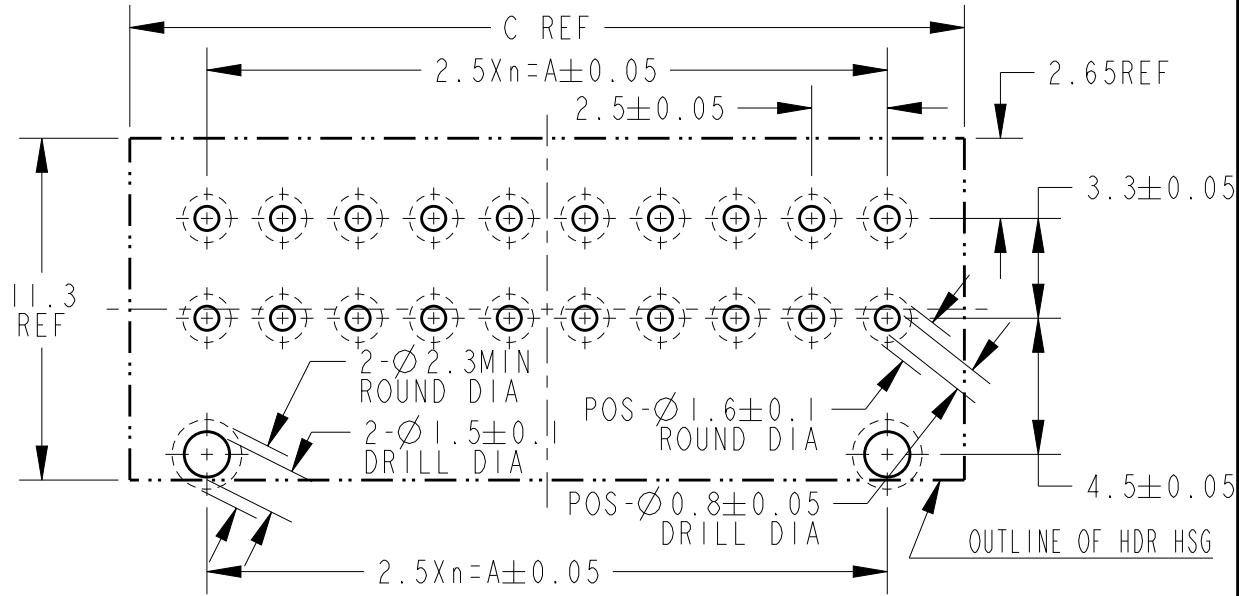

推奨基板取付穴寸法:コネクタ搭載面(非累積公差)
PC基板厚:1.0~1.6±0.1


RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE(NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

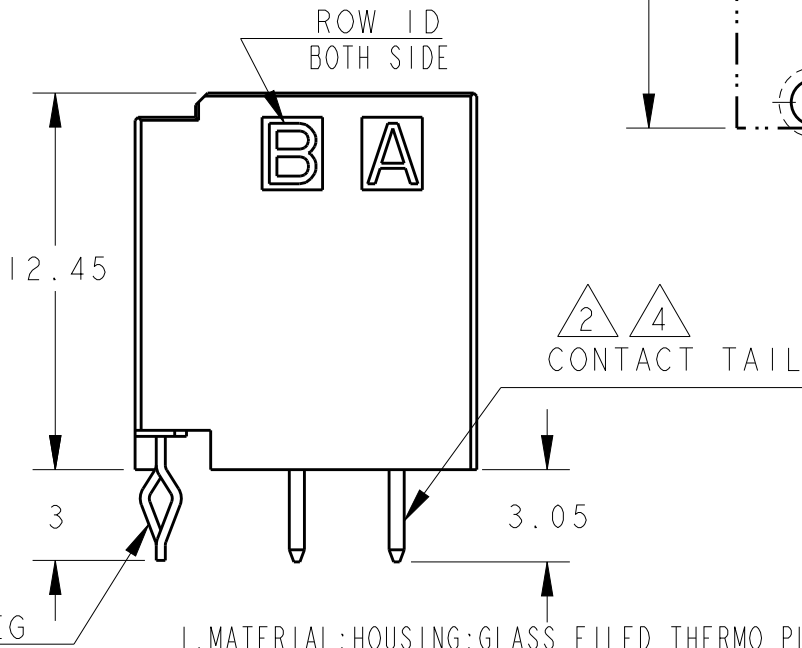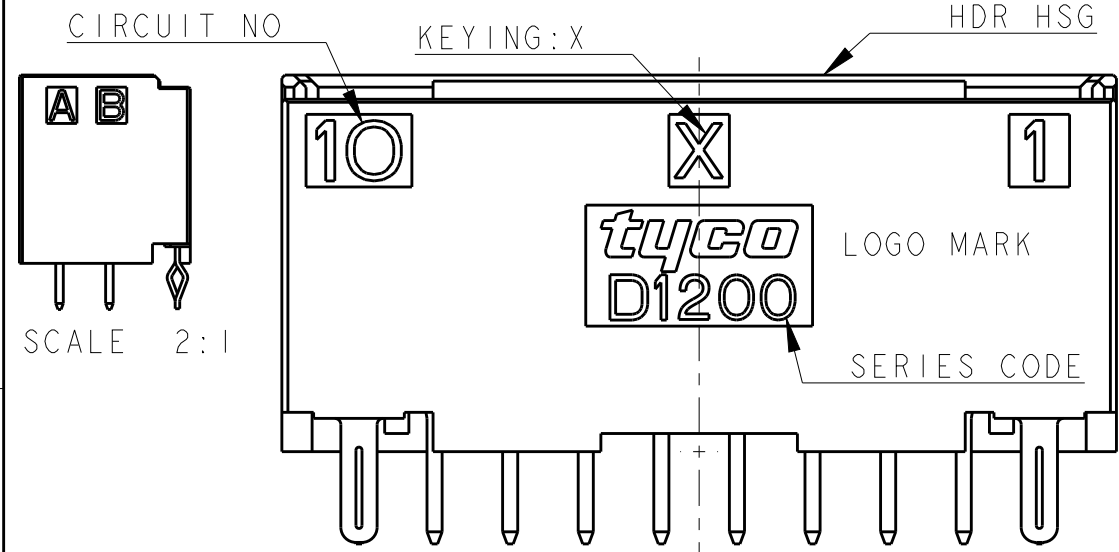


1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC
POLYESTER(94V-0), COLOR: BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: PRE-TIN COPPER ALLOY

2. FINISH(ALL OVER): NICKEL PL. 1.27μmMIN
3. FINISH(CONTACT AREA): GOLD PL. 0.38μmMIN AFTER 2
4. FINISH(CONTACT TAIL): TIN PL. 2μmMIN AFTER 2
5. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.
6. THE KEYING ARRANGEMENT OF "Y" IS SYMMETRIC WITH "X".

20	Y	9	22.5	26.0	27.6	2-1827875-0
20	X	9	22.5	26.0	27.6	1-1827875-0
16	Y	7	17.5	21.0	22.6	2-1827875-8
16	X	7	17.5	21.0	22.6	1-1827875-8
12	Y	5	12.5	16.0	17.6	2-1827875-6
12	X	5	12.5	16.0	17.6	1-1827875-6
10	Y	4	10.0	13.5	15.1	2-1827875-5
10	X	4	10.0	13.5	15.1	1-1827875-5
8	Y	3	7.5	11.0	12.6	2-1827875-4
8	X	3	7.5	11.0	12.6	1-1827875-4
6	Y	2	5.0	8.5	10.1	2-1827875-3
6	X	2	5.0	8.5	10.1	1-1827875-3
4	Y	1	2.5	6.0	7.6	2-1827875-2
4	X	1	2.5	6.0	7.6	1-1827875-2
POS	KEY	n	A	B	C	PART NO

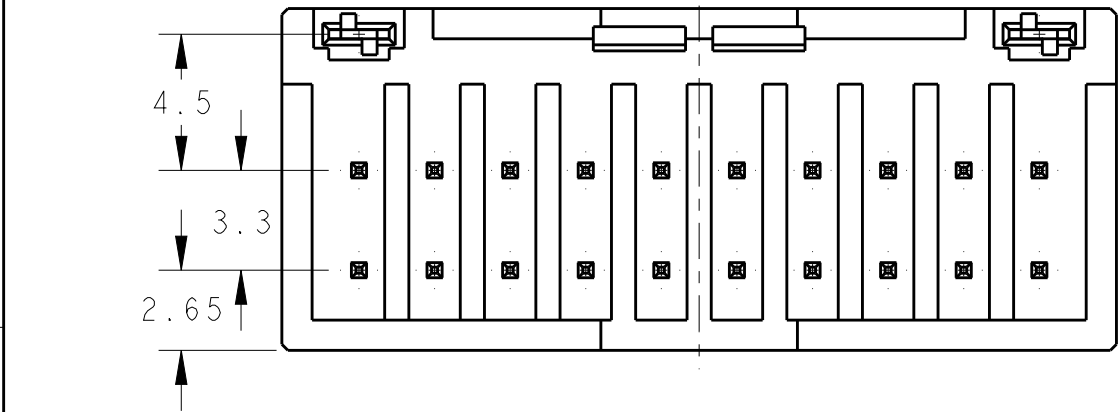



20POS(X-KEY): 1-1827875-0

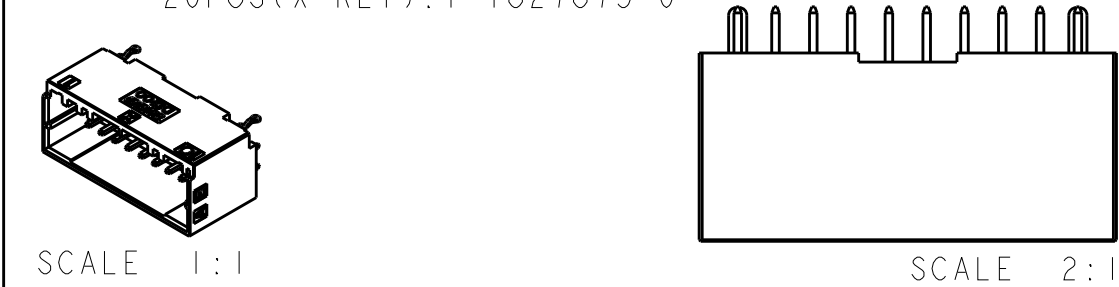

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KUDO	14JAN2005	TE Connectivity		
		CHK D. MITSUGI	14JAN2005			
		APVD D. MITSUGI	14JAN2005	NAME 名称 DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS		
		PRODUCT SPEC 製品規格 108-78268		SIZE A3		
		APPLICATION SPEC 取付適用規格 114-5377		CAGE CODE 00779		
		WEIGHT -		DRAWING NO 番号 C-1827875		
		CUSTOMER DRAWING		RESTRICTED TO -		
				SCALE 尺度 4:1		
				SHEET 1 OF 3		
				REV B		





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
J	-			SEE SHEET 1 OF 3		

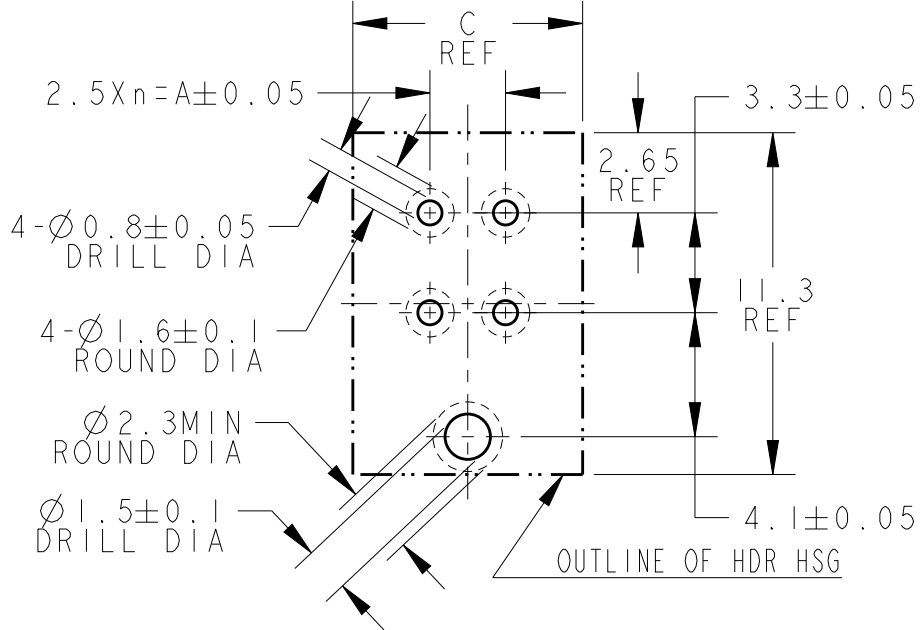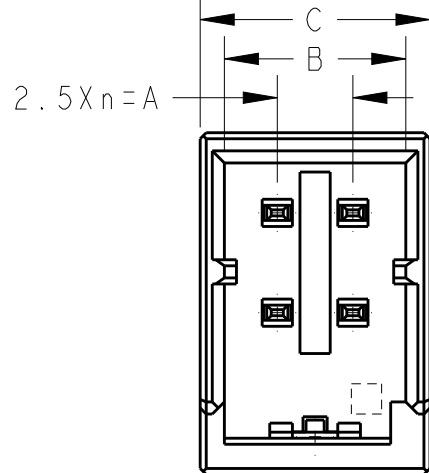







推奨基板取付穴寸法: コネクタ搭載面 (非累積公差)
PC基板厚: 1.0~1.6±0.1
RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

ONLY 4POS

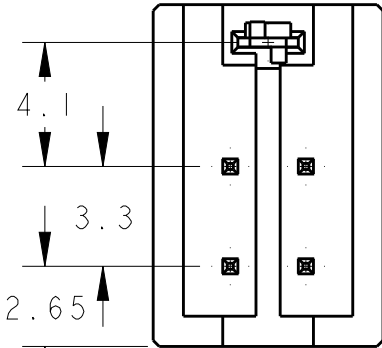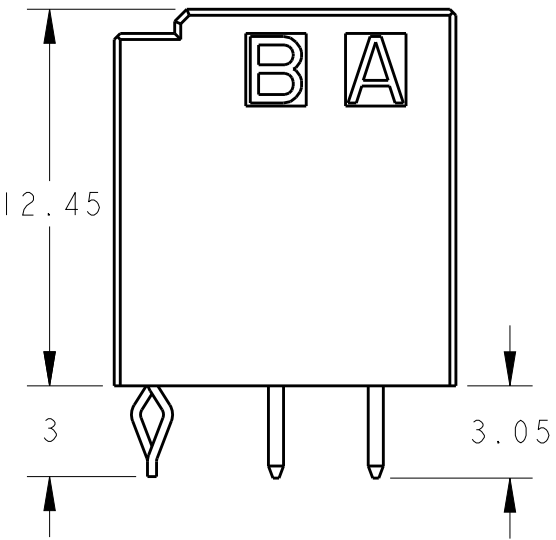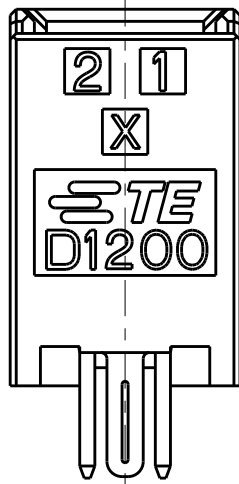

SCALE 2:1

4POS(X-KEY):1-1827875-2




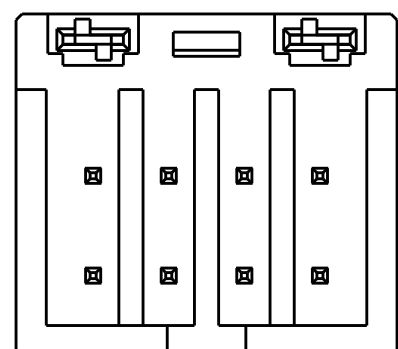

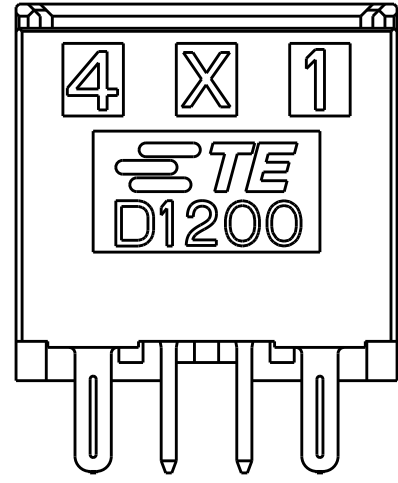
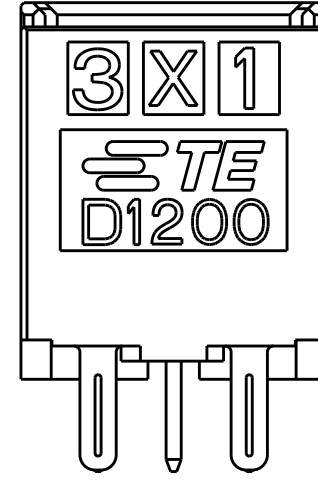
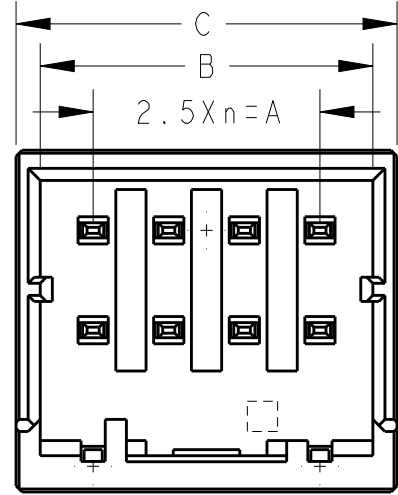
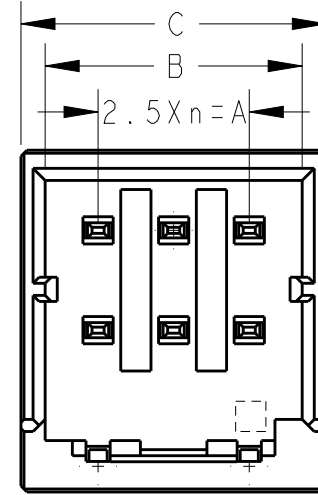


6POS(X-KEY):1-1827875-3

8POS(X-KEY):1-1827875-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KUDO 14JAN2005	 TE Connectivity			
DIMENSIONS: mm		CHK D. MITSUGI 14JAN2005				
		APVD D. MITSUGI 14JAN2005	NAME DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS			
		PRODUCT SPEC 108-78268	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-5377	A300779C-1827875			
MATERIAL & material		WEIGHT -	SCALE 4:1 SHEET 2 OF 3 REV B			
		CUSTOMER DRAWING				


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	-			SEE SHEET 1 OF 3		

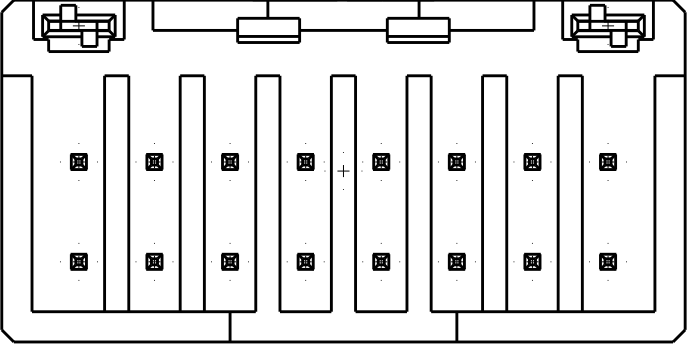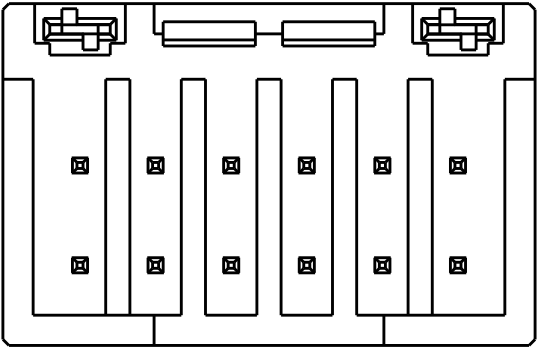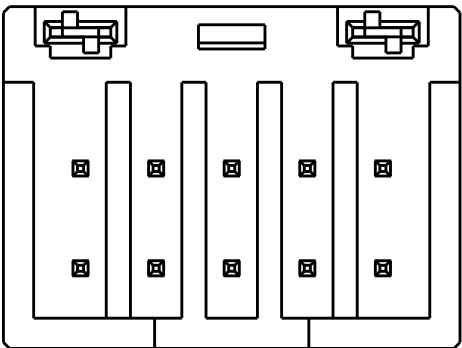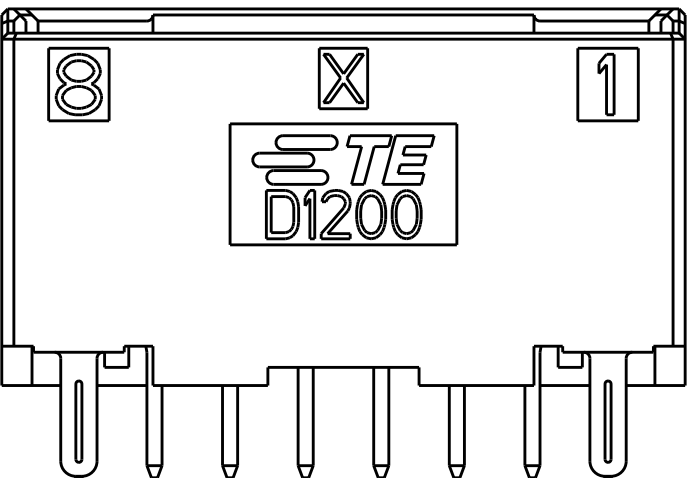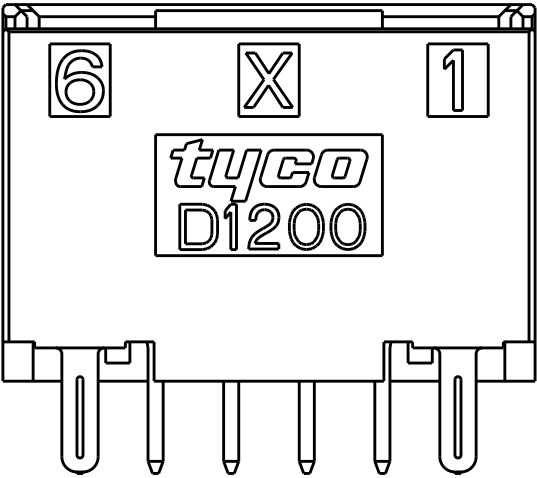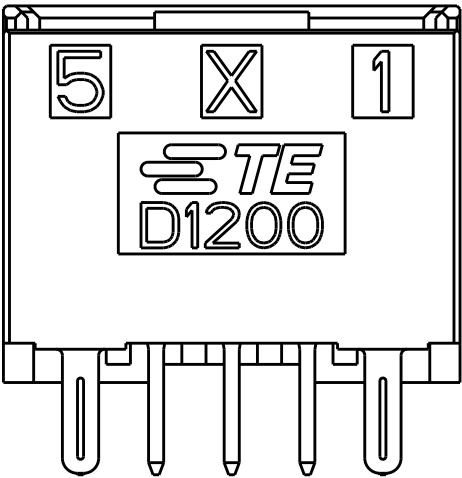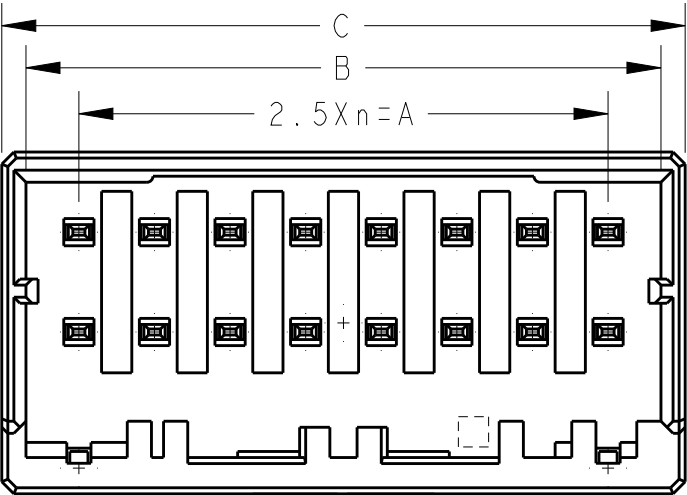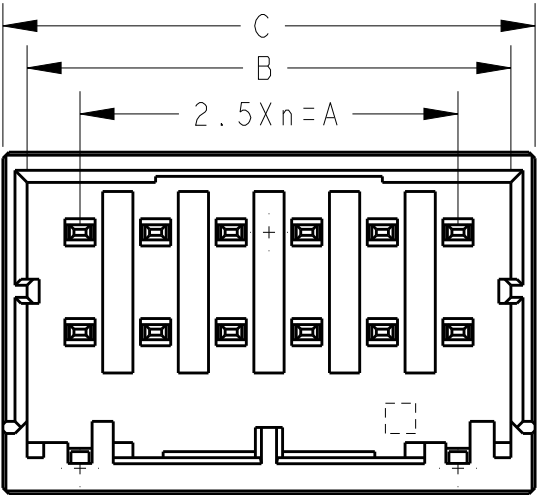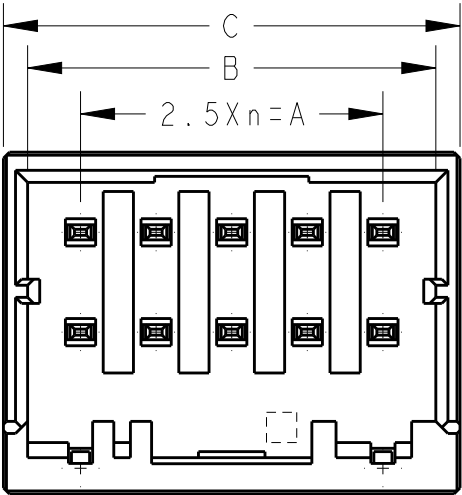

10POS(X-KEY):1-1827875-5

12POS(X-KEY):1-1827875-6

16POS(X-KEY):1-1827875-8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KUDO	14JAN2005	 TE Connectivity	
DIMENSIONS: mm		CHK D. MITSUGI	14JAN2005		
 		APVD D. MITSUGI	14JAN2005	NAME DYNAMIC DI200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS	
		PRODUCT SPEC 108-78268			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±0.5		APPLICATION SPEC 114-5377		RESTRICTED TO	
		WEIGHT -		-	
MATERIAL &material		FINISH -		SCALE 4:1	
CUSTOMER DRAWING				SHEET 3 OF 3	
				REV B	