
EKMC(VZ)series

Current Consumption 170 μ A Digital output

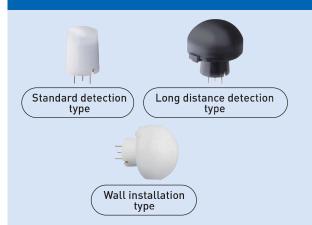

Economy type suitable for a wide range of applications

Recommended applications

Lighting control, lighting equipment, heaters, ventilators or air conditioners, security equipment for IP cameras, intrusion alarms, digital signage, vending machines, multi-function printers, display panels for meeting rooms, PCs

Lensless type available 170µA type: EKMC1600100

Specifications

Detection performance	Model no.	Current	Lens color	Output type	Detection	Detection area		Detection
Detection performance	Model no.	consumption	Lens color	Output type	distance	Horizontal	Vertical	zones
Standard detection type	EKMC1601111		White					
	EKMC1601112		Black		5m	94°	82°	64
	EKMC1601113		Pearl white					
Long distance detection type	EKMC1603111		White					
	EKMC1603112	170µA	Black	Digital	12m	102°	92°	92
	EKMC1603113		Pearl white					
Wall installation type	EKMC1604111		White		12m (1st step lens)			
	EKMC1604112		Black		6m (2nd step lens)	40°	105°	68
	EKMC1604113		Pearl white		3m (3rd step lens)			

■Ordering EKMC16 1 information Lens color ●PaPIRs motion sensor 0: Lensless / 1: White / ●Detection(Lens) 2: Black / 3: Pearl white 00: Lensless / 01: 5m distance standard / 03: 12m long distance / 04: Wall installation type 0: Lensless / 1: with lens

Characteristics

■Maximum rated values

Items	Value
Power supply voltage	-0.3 to 7V
Ambient temperature	-20 to +60℃ (no frost, no condensation)
Storage temperature	-20 to +70℃

■Electrical characteristics

Items		Symbol	EKMC (VZ) type	Conditions
Operating	Max	Vdd	6.0V	_
voltage	Min	vau	3.0V	_
Current consumption (in standby mode) Note 1)	Ave	lw	170# A	Ambient temperature: 25°C lout=0 Vdd: 5V
Output current (during detection) Note 2)	Max	lout	100µA	Ambient temperature: 25°C Vout≧Vdd-0.5
Output voltage (during detection period)	Min	Vout	Vdd-0.5V	Ambient temperature: 25°C Open at no detection
Circuit stability time (when voltage is applied)	Max	Twu	30 sec	Ambient temperature: 25°C lout=0 Vdd: 5V


Note 1) Current consumption during detection period is the total value of current consumption in standby mode add to output current.

Note 2) Please select an output resistors (pull-down concept) in accordance with Vout so that the output current is lower than or equal to $100\mu A$. If the output current is more than 100µA, this may cause false alarms.

[Explanation of the timing]
Twu: Circuit stability time: max. 30 sec

During this stage, the output's status is undefined (ON/OFF) and detection is therefore not guaranteed.

Timing chart

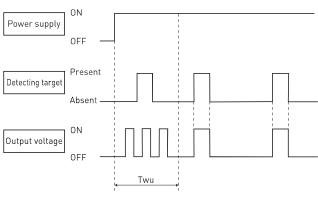

Lenses for the EKMB/EKMC series

$\underset{(mm)}{\text{Dimension}}$


Detection zone


Detection characteristics

Standard detection type












Detection distance	Max. 5m	
Field of view	94°×82°	
Detection zone	64 beams	
Detection condition	•The temperature difference between the target and the surroundings must be higher than 4°C.	
	·Movement speed: 1.0m/s	
	·Target concept: Human body with an approx. size of 700×250mm	
	·Target moving direction: Crossing the detection beam.	

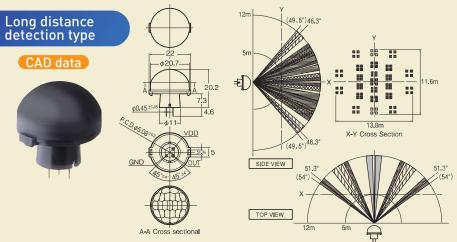

Detection distance	Max. 12m	
Field of view	102°×92°	
Detection zone	92 beams	
Detection condition	•The temperature difference between the target and the surroundings must be higher than 4°C.	
	·Movement speed: 1.0m/s	
	∙Target concept: Human body with an approx. size of 700×250mm	
	·Target moving direction: Crossing the detection beam.	

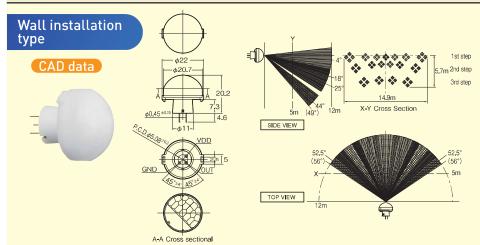

Detection distance	1st step lens Max. 12		
	2nd step lens	Max. 6m	
	3rd step lens	Max. 3m	
Field of view	40°×105°		
Detection zone	68 beams		
Detection condition	•The temperatu between the ta surroundings r than 4°C. •Movement spe •Target concept body with an al 700×250mm •Target moving	rget and the nust be higher ed: 1.0m/s : Human oprox. size of direction:	
	Crossing the detection beam.		







■PIR element

Detection Average: 5.6µW/cm sensitivity Maximum: 7.6µW/cm²

 $\ensuremath{\,\%}$ Detection sensitivity is measured by following system

■Test setup





Horizontally wide detection type

Current consumption 1/2/6/170µA

Digital output




> World's first PIR with "Approach Sensing" technology

Panasonic presents the world's first PIR sensor in the shape of a hammerhead with a special optic, which is more sensitive to radial motion.



Recommended applications

Wall switches, thermostats, IP cameras, wake-up switch for displays, intrusion alarm sensors (e.g. for windows and doors), door intercom systems, entrance and garden lamps, automatic door systems, vending machines

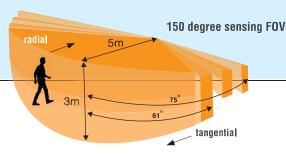

Horizontally wide detection type

Current consum in standby mod (1µA type: in sleep	nption le mode)	1μΑ	2µА	бµА	170µА
► Output			Digital (ope	en collector)	
	White	EKMB1105111	EKMB1205111	EKMB1305111K	EKMC1605111
▶ Lens color	Black	EKMB1105112	EKMB1205112	EKMB1305112K	EKMC1605112
	Pearl white	EKMB1105113	EKMB1205113	EKMB1305113K	EKMC1605113

Dimension (mm) CAD data by request (1024) (25') (0.45 ± 0.05 | (25') (0.433 dia.) PC.D. Ø 5.08 ± 0.2 (0.2 dia.) (0.138) (0.236) (0.236) Detection zone (109) (109) (25')

Detection distance	Max. 5m*		
Field of	Area A	122° x 35°	
view	Area B	150° x 20°	
Detection	Area A	88	
zone	Area B	16	
Detection condition 🛦	Area A	 The temperature difference between the target and the surroundings must be higher than 4°C. 	
		Movement speed: 1m/s	
		 Target concept: human head with an approx. size of 700x250mm 	
		Target moving direction: crossing 2 detection zones	
	Area B	The temperature difference between the target and the surroundings must be higher than 8°C.	
		• Movement speed: 1m/s	
		 Target concept: human body with an approx. size of 700x250mm 	
		Target moving direction: crossing 2 detection zones	

Detection characteristics

▲ Please refer to "Cautions for use" (page 18) and
"Basic principles"(page 18, point 5), for more details

Standard and slight motion detection type

Current consumption 1/2/6/170µA

Digital output







> 2 functions in 1 lens

High Sensitivity Centre ZONE: Optimized for detecting small movements and small objects
Normal Sensitivity Outer ZONE: Optimized for detecting larger movements of larger objects



Recommended applications

Lighting control, heaters, ventilators or air conditioners, IP cameras, intrusion alarms, digital signage, vending machines, multi-function printers, display panels for meeting rooms, PCs

