



LOC	DIST	REVISIONS						
GP	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
			C	REVISED PER ECR-19-008054	22MAY2019	IT	SH	
			C1	ADD PN 2-4	27AUG2019	IT	SH	
			C2	ADD PN 1-3 WITH 1.25MM TAILS	15JUN2020	IT	SH	
			C3	ADD PN 3-2 PER ECN-21-106888	17MAY2021	SZ	SZ	

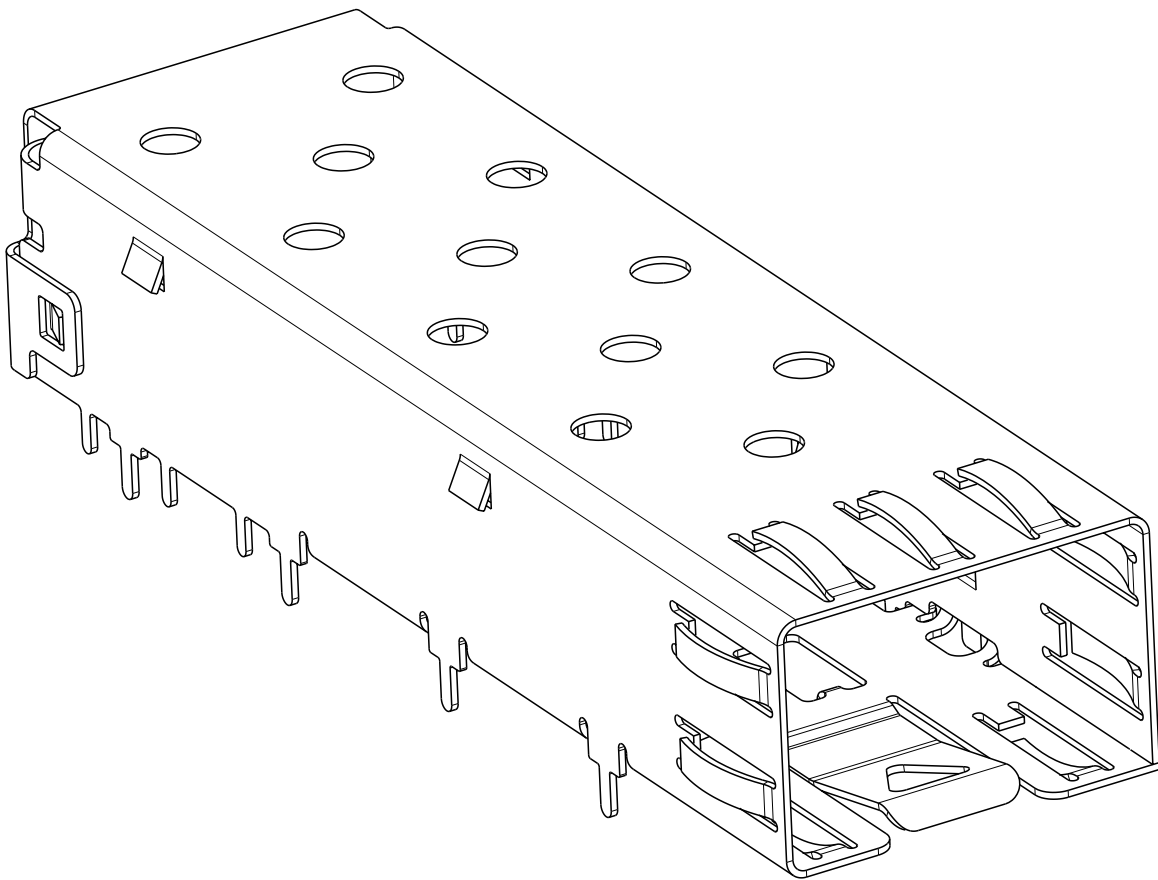


2227303-1, -2, -3, -7
1-2227303-2/3

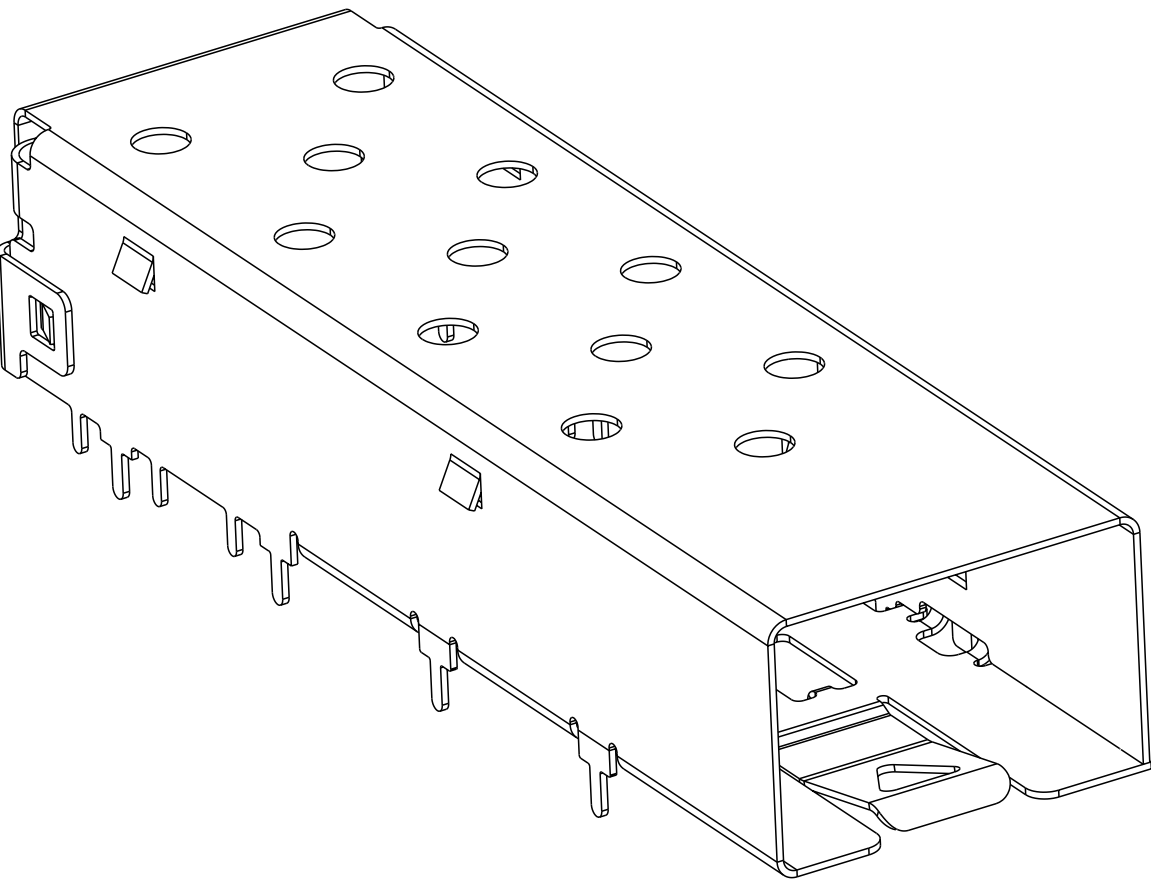


3-2227303-2






- MATERIAL: 0.25mm THICK STAINLESS STEEL.
- FINISH: 0.00125mm Min. NICKEL OVER ALL , 0.002mm Min.TIN DIPPED ON SOLDER TABS, NON PLATED EDGES PERMISSIBLE.
- MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- PADS AND VIAS CHASSIS GROUND.
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50 mm
- REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR
RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- REFERENCE APPLICATION SPEC. 114-13120, HOLE C, FOR
RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- ESD PROTECTION PACKAGE.
- WITHOUT THREE LOCATION PINS
- WITHOUT EMI SPRING
- WITH CUSTOMIZED HEATSINK OPEN
- PRELIMINARY PART

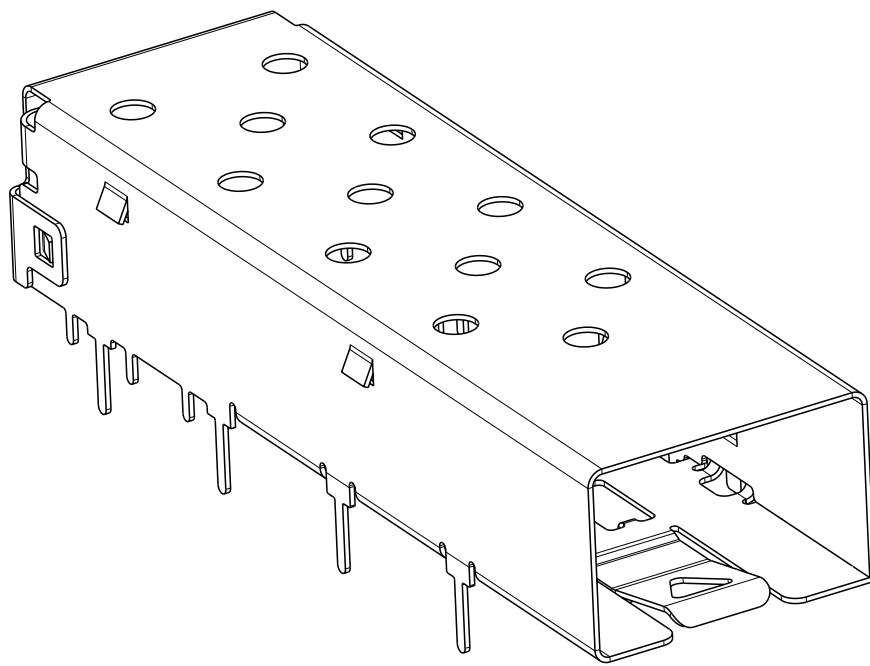

1-2227303-1

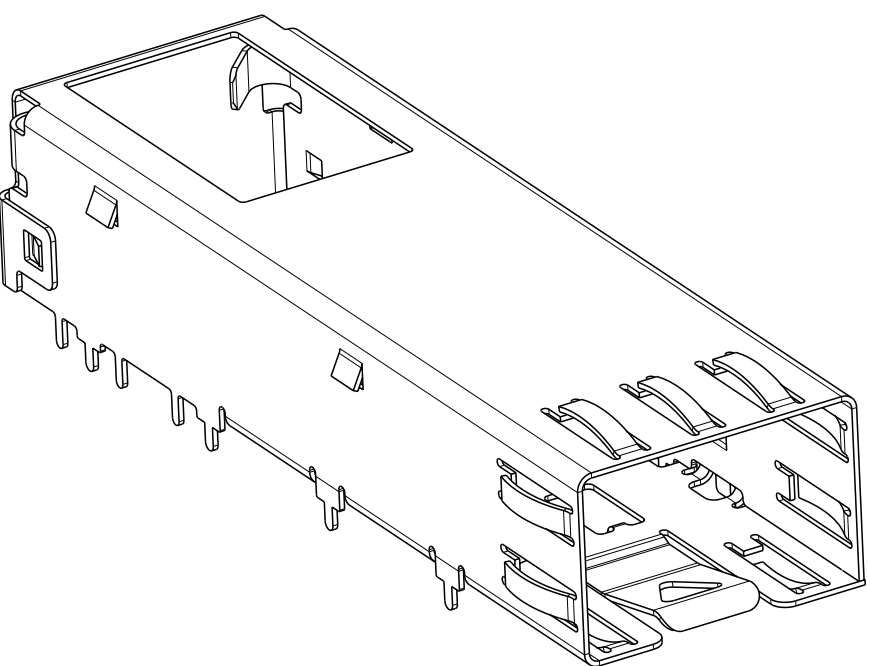

2-2227303-2, 2-2227303-4

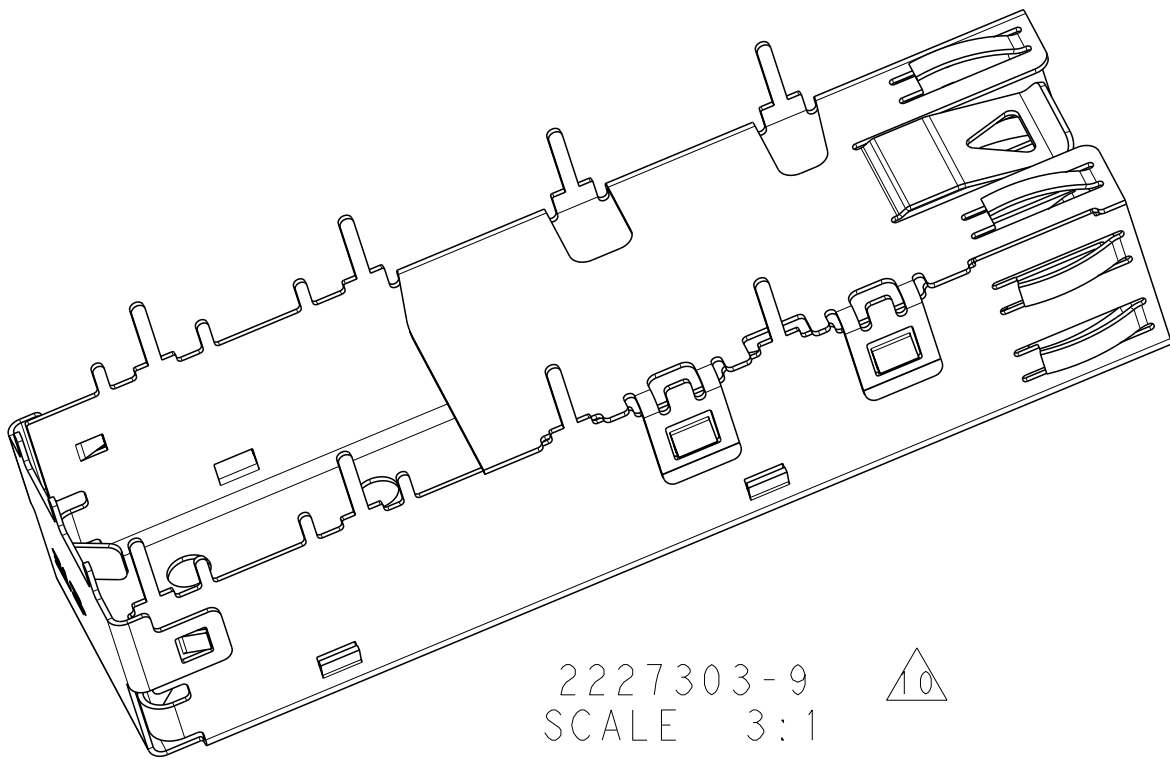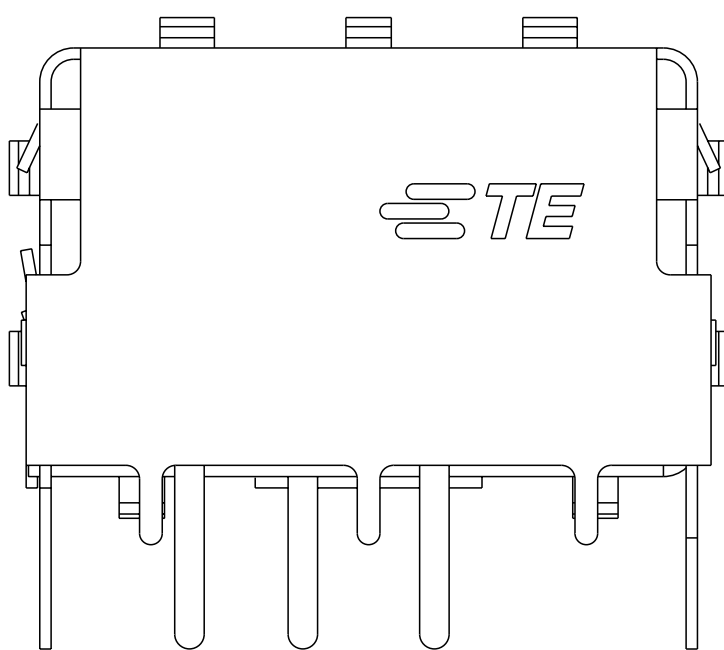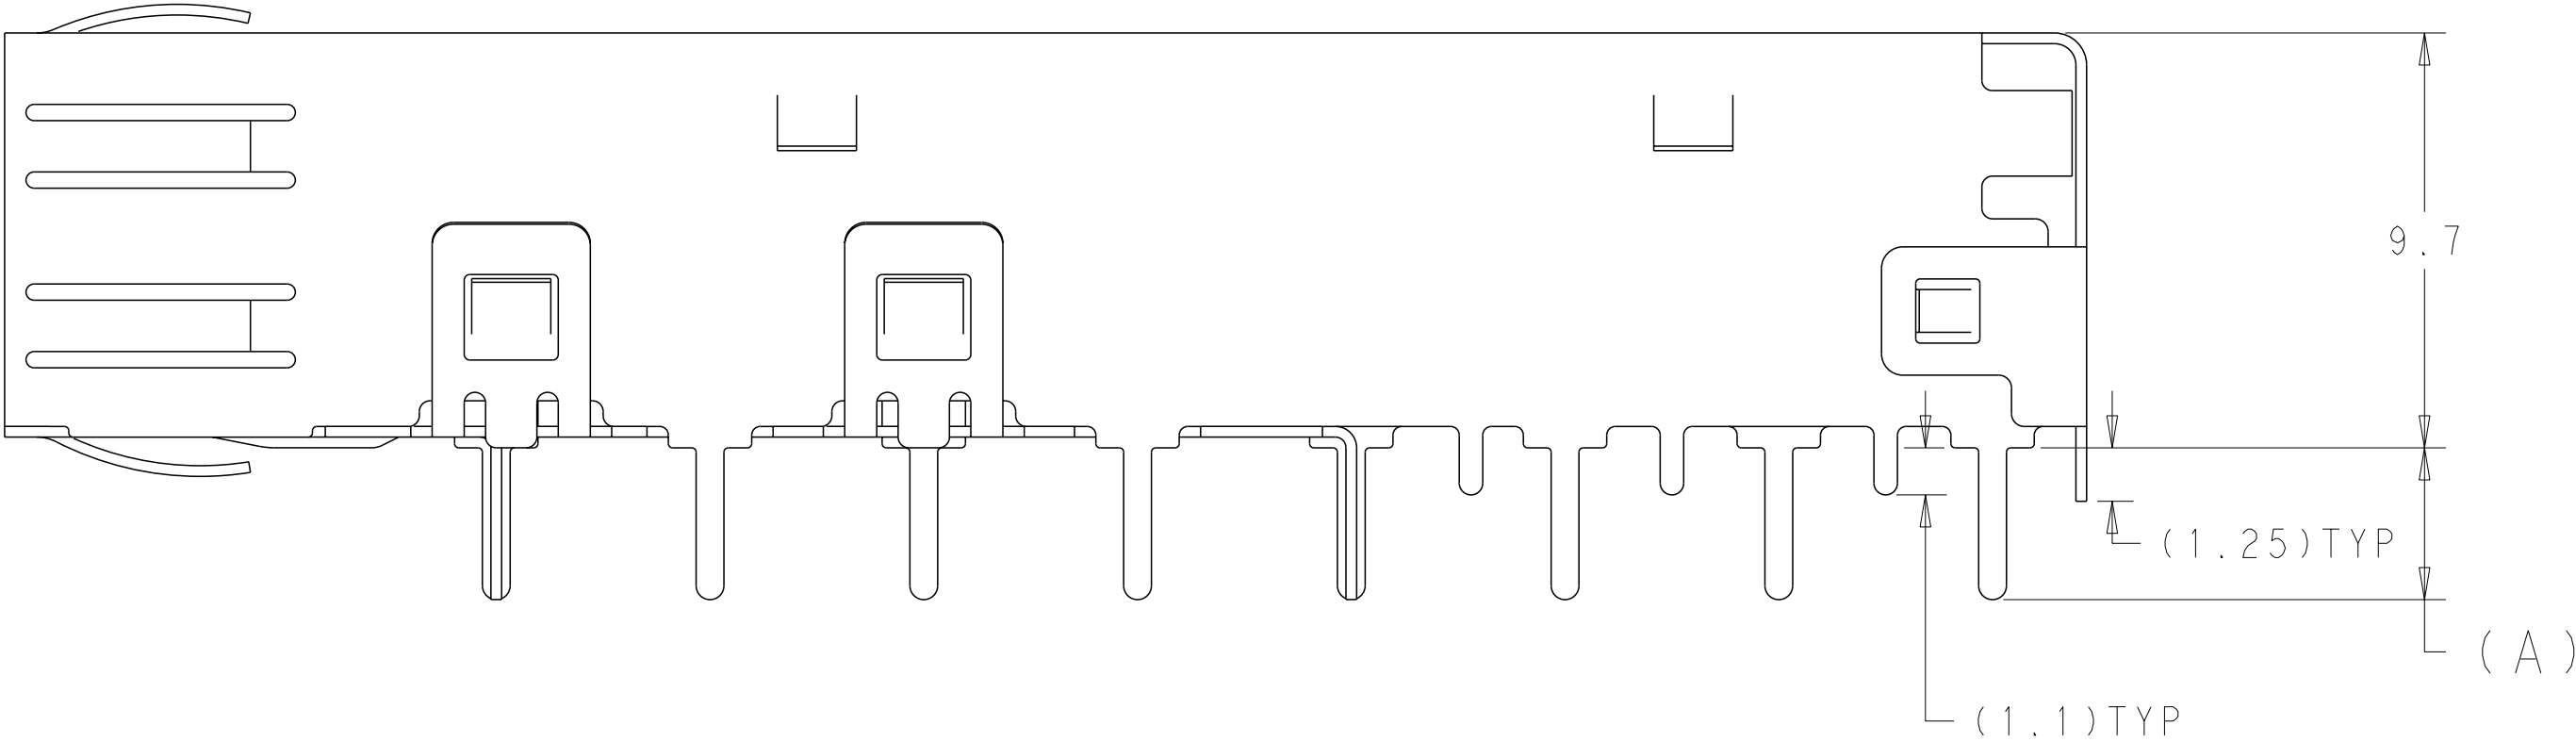
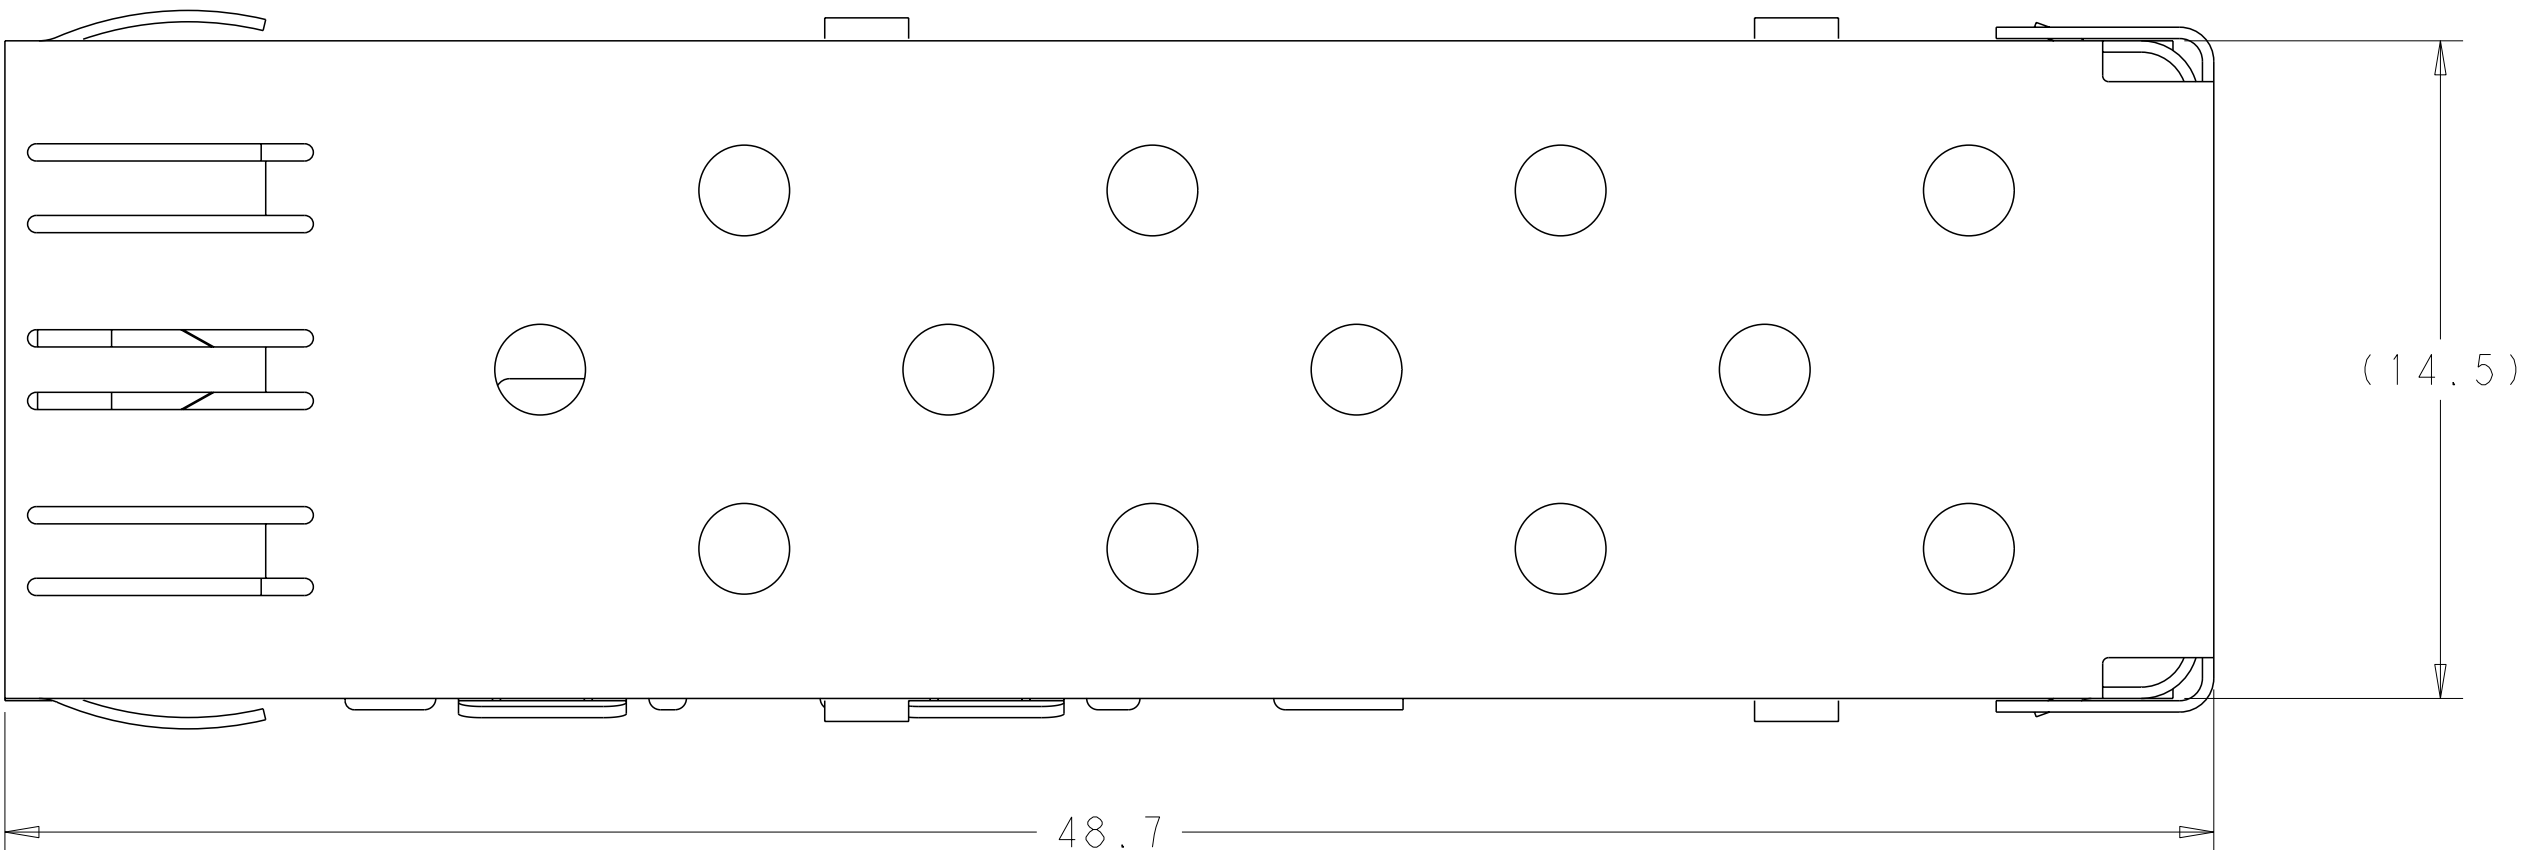
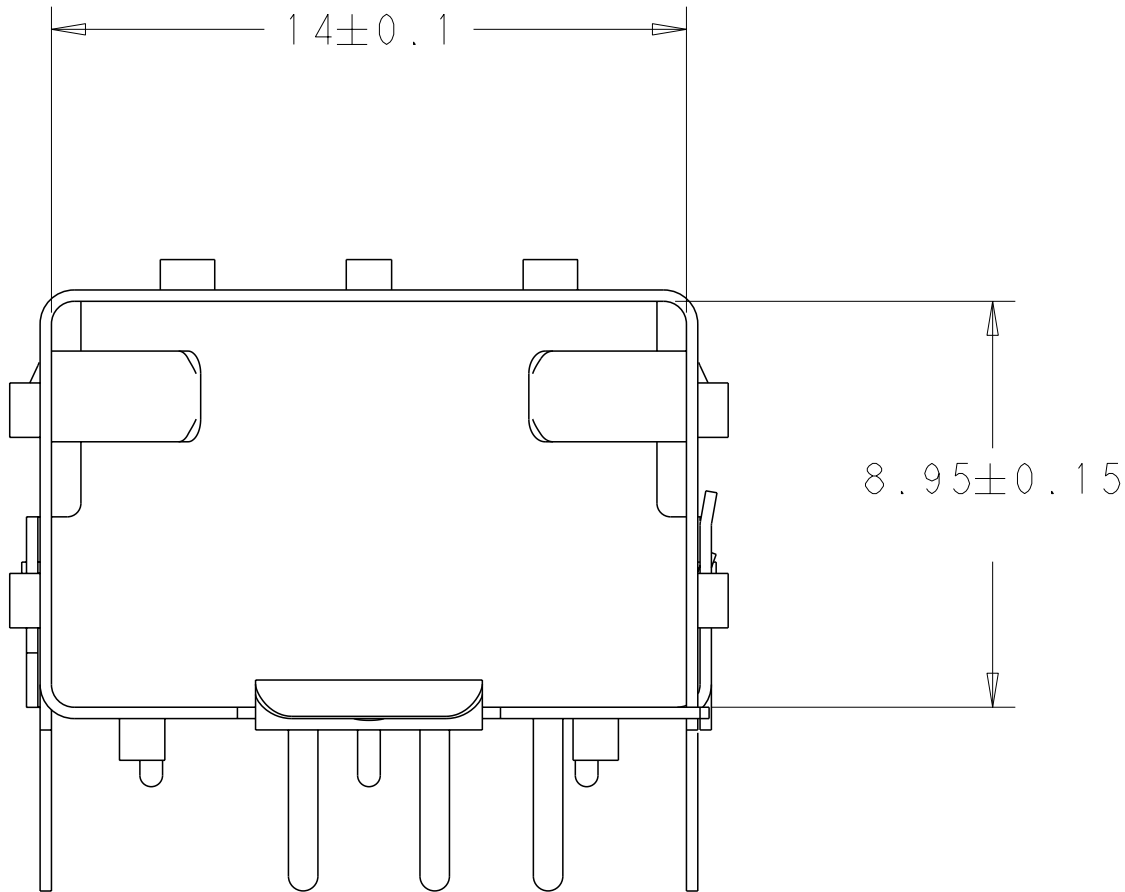


2227303-9
SCALE 3:1

WITHOUT EMI SPRING	REEL	1.80	3-2227303-2
WITH HEATSINK OPEN	REEL	1.25	2-2227303-4
WITH HEATSINK OPEN	REEL	1.25	2-2227303-2
WITHOUT EMI SPRING	TRAY	3.55	1-2227303-1
WITHOUT LOCATION PIN	TRAY	3.55	2227303-9
ALL PINS 3.55 LENGTH	TRAY	3.55	2227303-7
STANDARD TYPE WITH AIR VENTS,EMI SPRING,LOCATION PIN	REEL	1.25	1-2227303-3
	REEL	1.80	1-2227303-2
	TRAY	1.80	2227303-3
	REEL	1.80	2227303-2
	TRAY	3.55	2227303-1
DESCRIPTION	PACKAGING	A	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN C. VALENTINE CHK M. SCHMITT APVD W. SCHMITT	19OCT2012 19OCT2012 19OCT2012	NAME SFP, 1X1 SINGLE PIECE CAGE, SOLDER PIN	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC		SIZE	CAGE CODE
mm	0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ± ANGLES ±°	108-1950		DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	APPLICATION SPEC		A100779C=2227303	
-	-	114-13120		Customer Drawing	SCALE 6:1 SHEET 1 OF 3 REV C3

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET 1	-	-	-

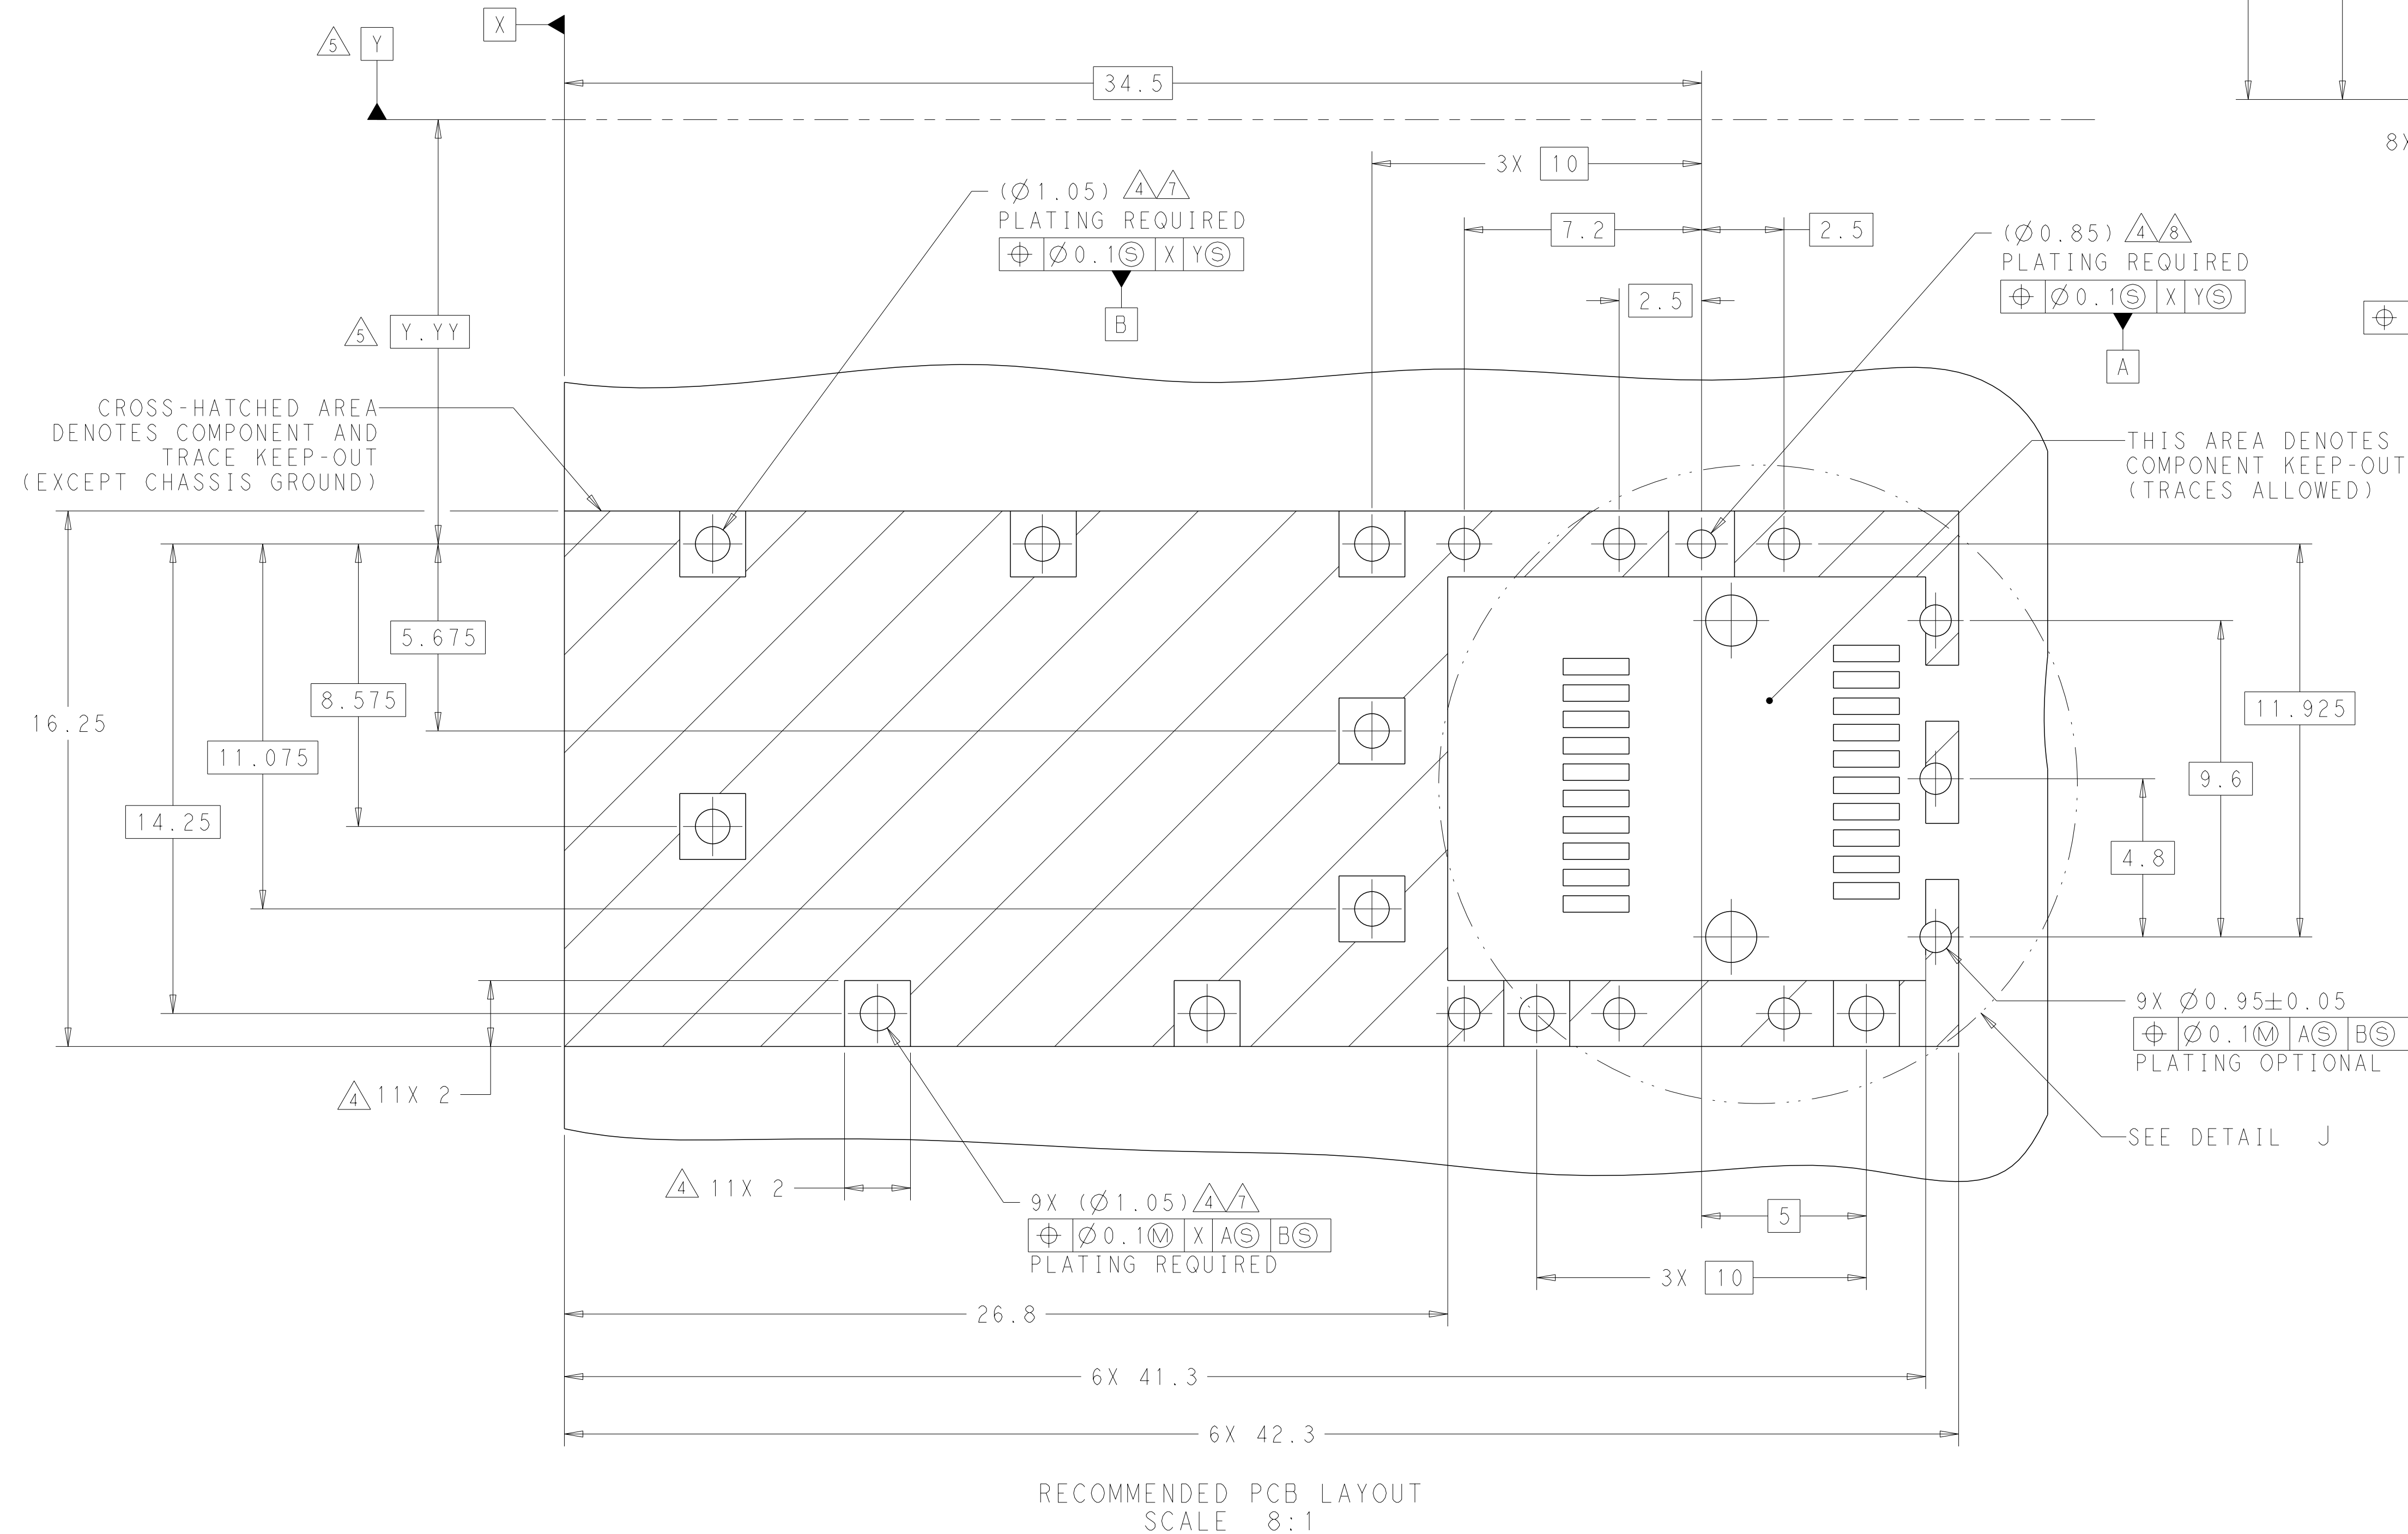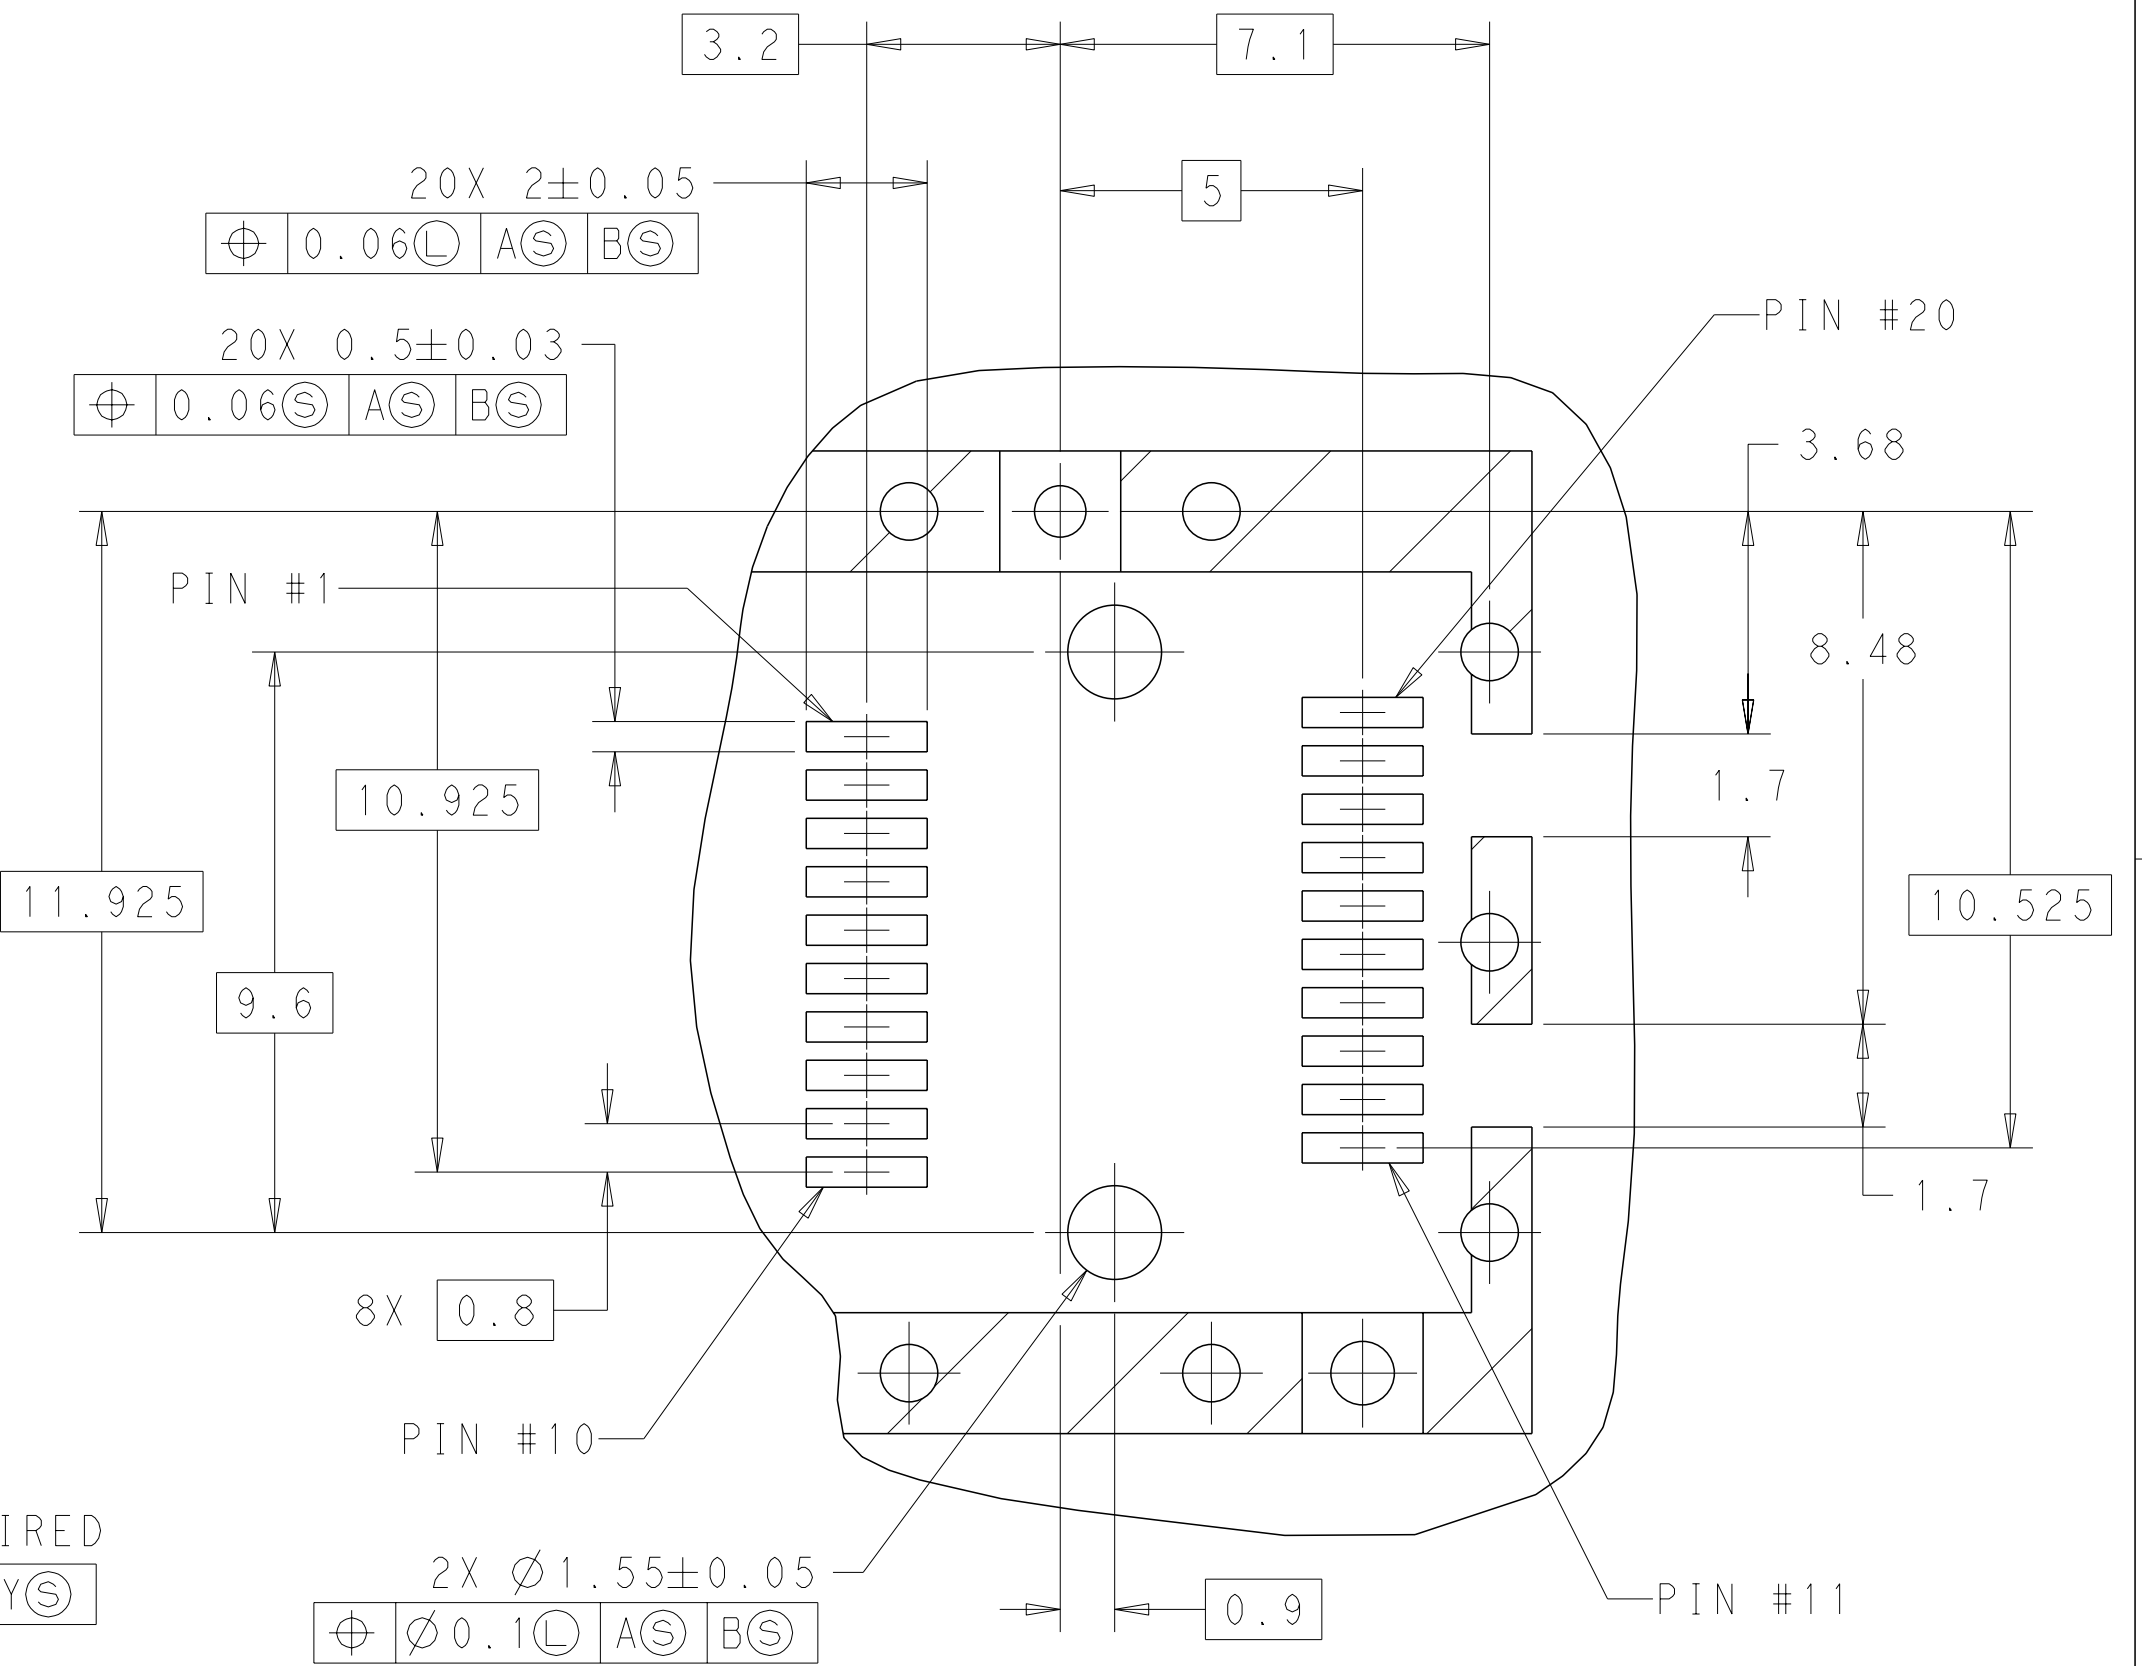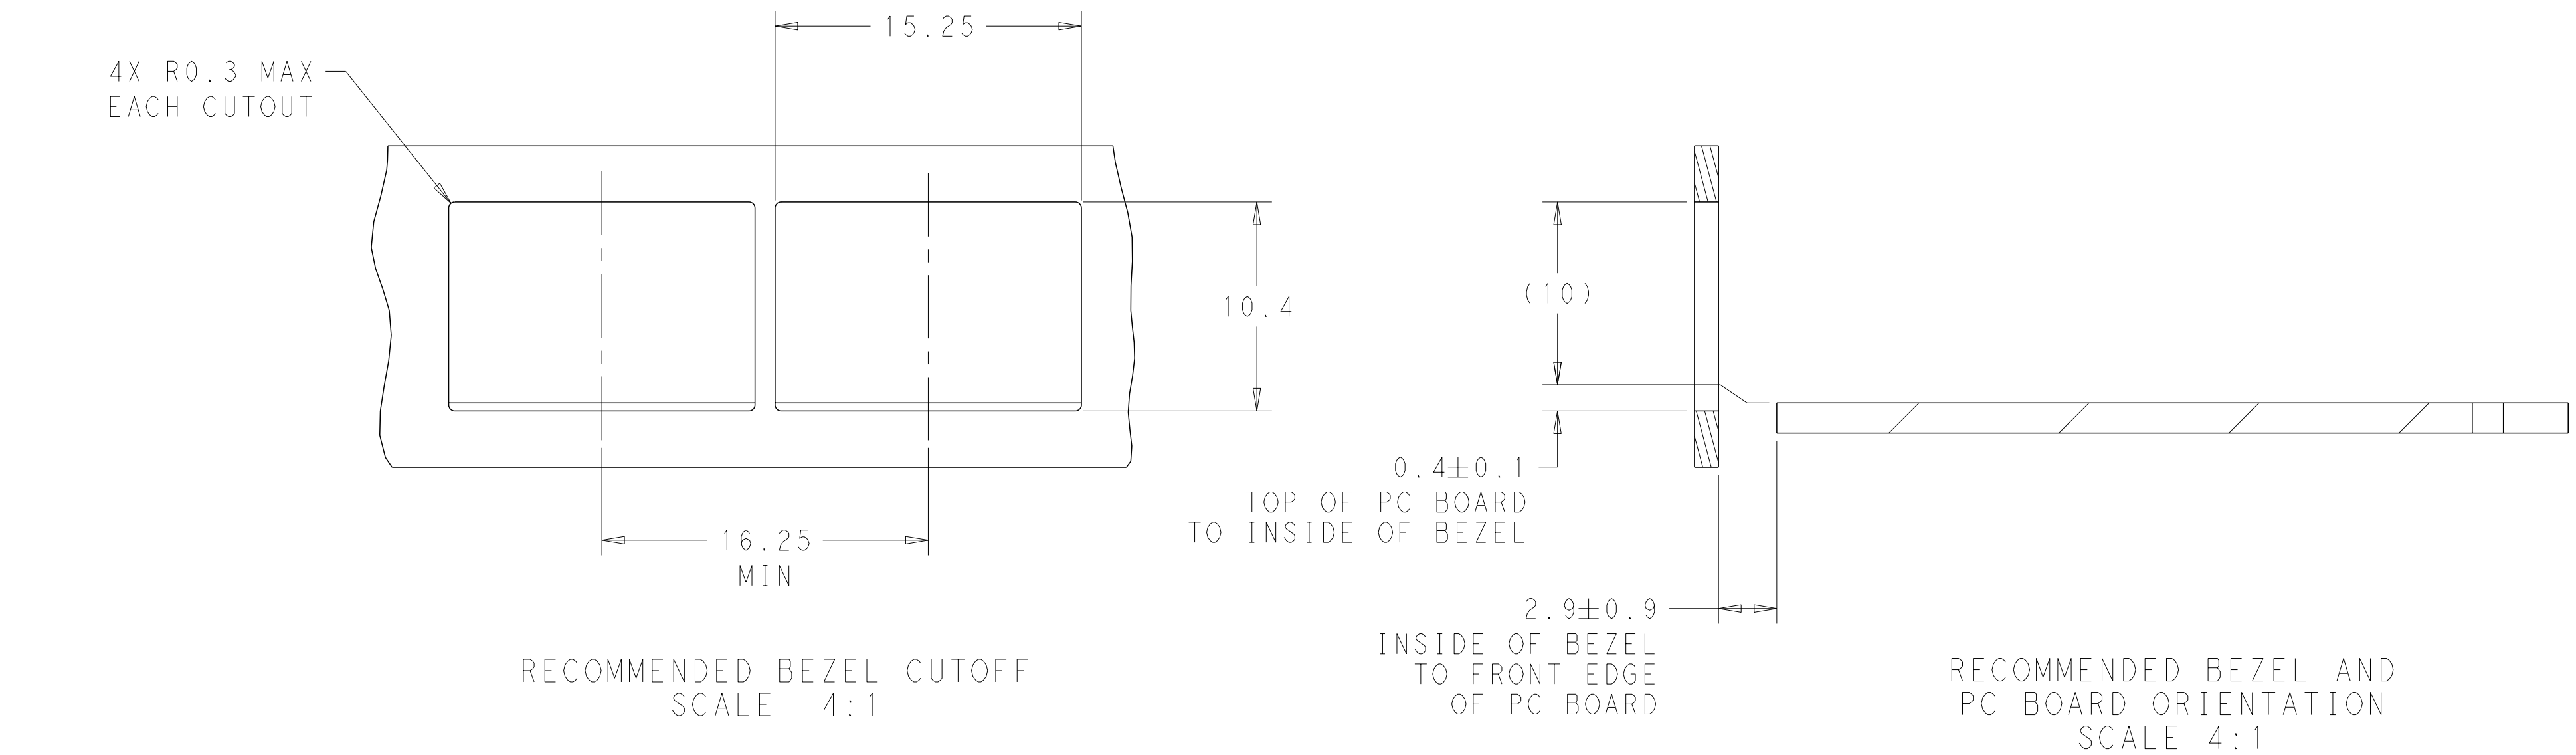


THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		DWN C. VALENTINE	19OCT2012	TE Connectivity	
		CHK M. SCHMITT	19OCT2012		
DIMENSIONS:		APVD M. SCHMITT	19OCT2012	NAME SFP, 1X1 SINGLE PIECE CAGE, SOLDER PIN	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1950	
0 PLC ±0.1		1 PLC ±0.1		APPLICATION SPEC	
2 PLC ±0.1		3 PLC ±0.1		114-13120	
4 PLC ±		ANGLES		WEIGHT	
FINISH		-		-	
MATERIAL		-		Customer Drawing	
				SCALE 6:1 SHEET 2 OF 3 REV C3	

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET 1	-	-	-

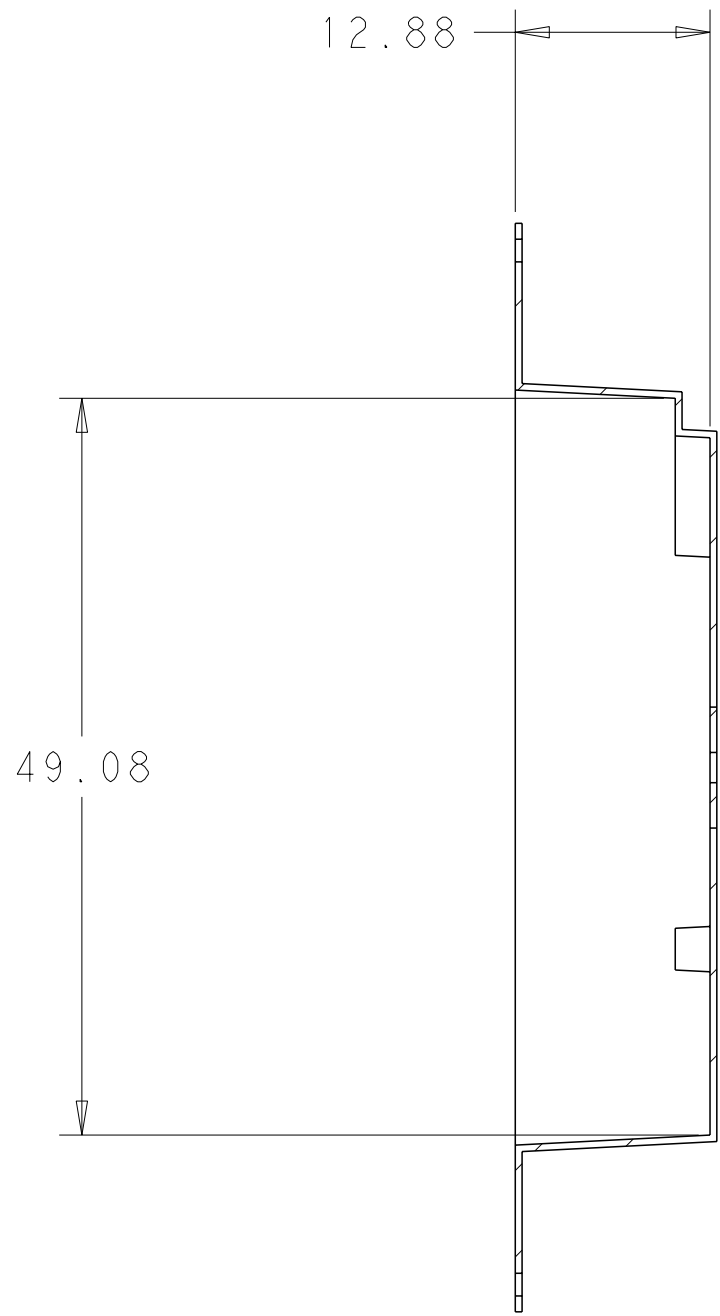
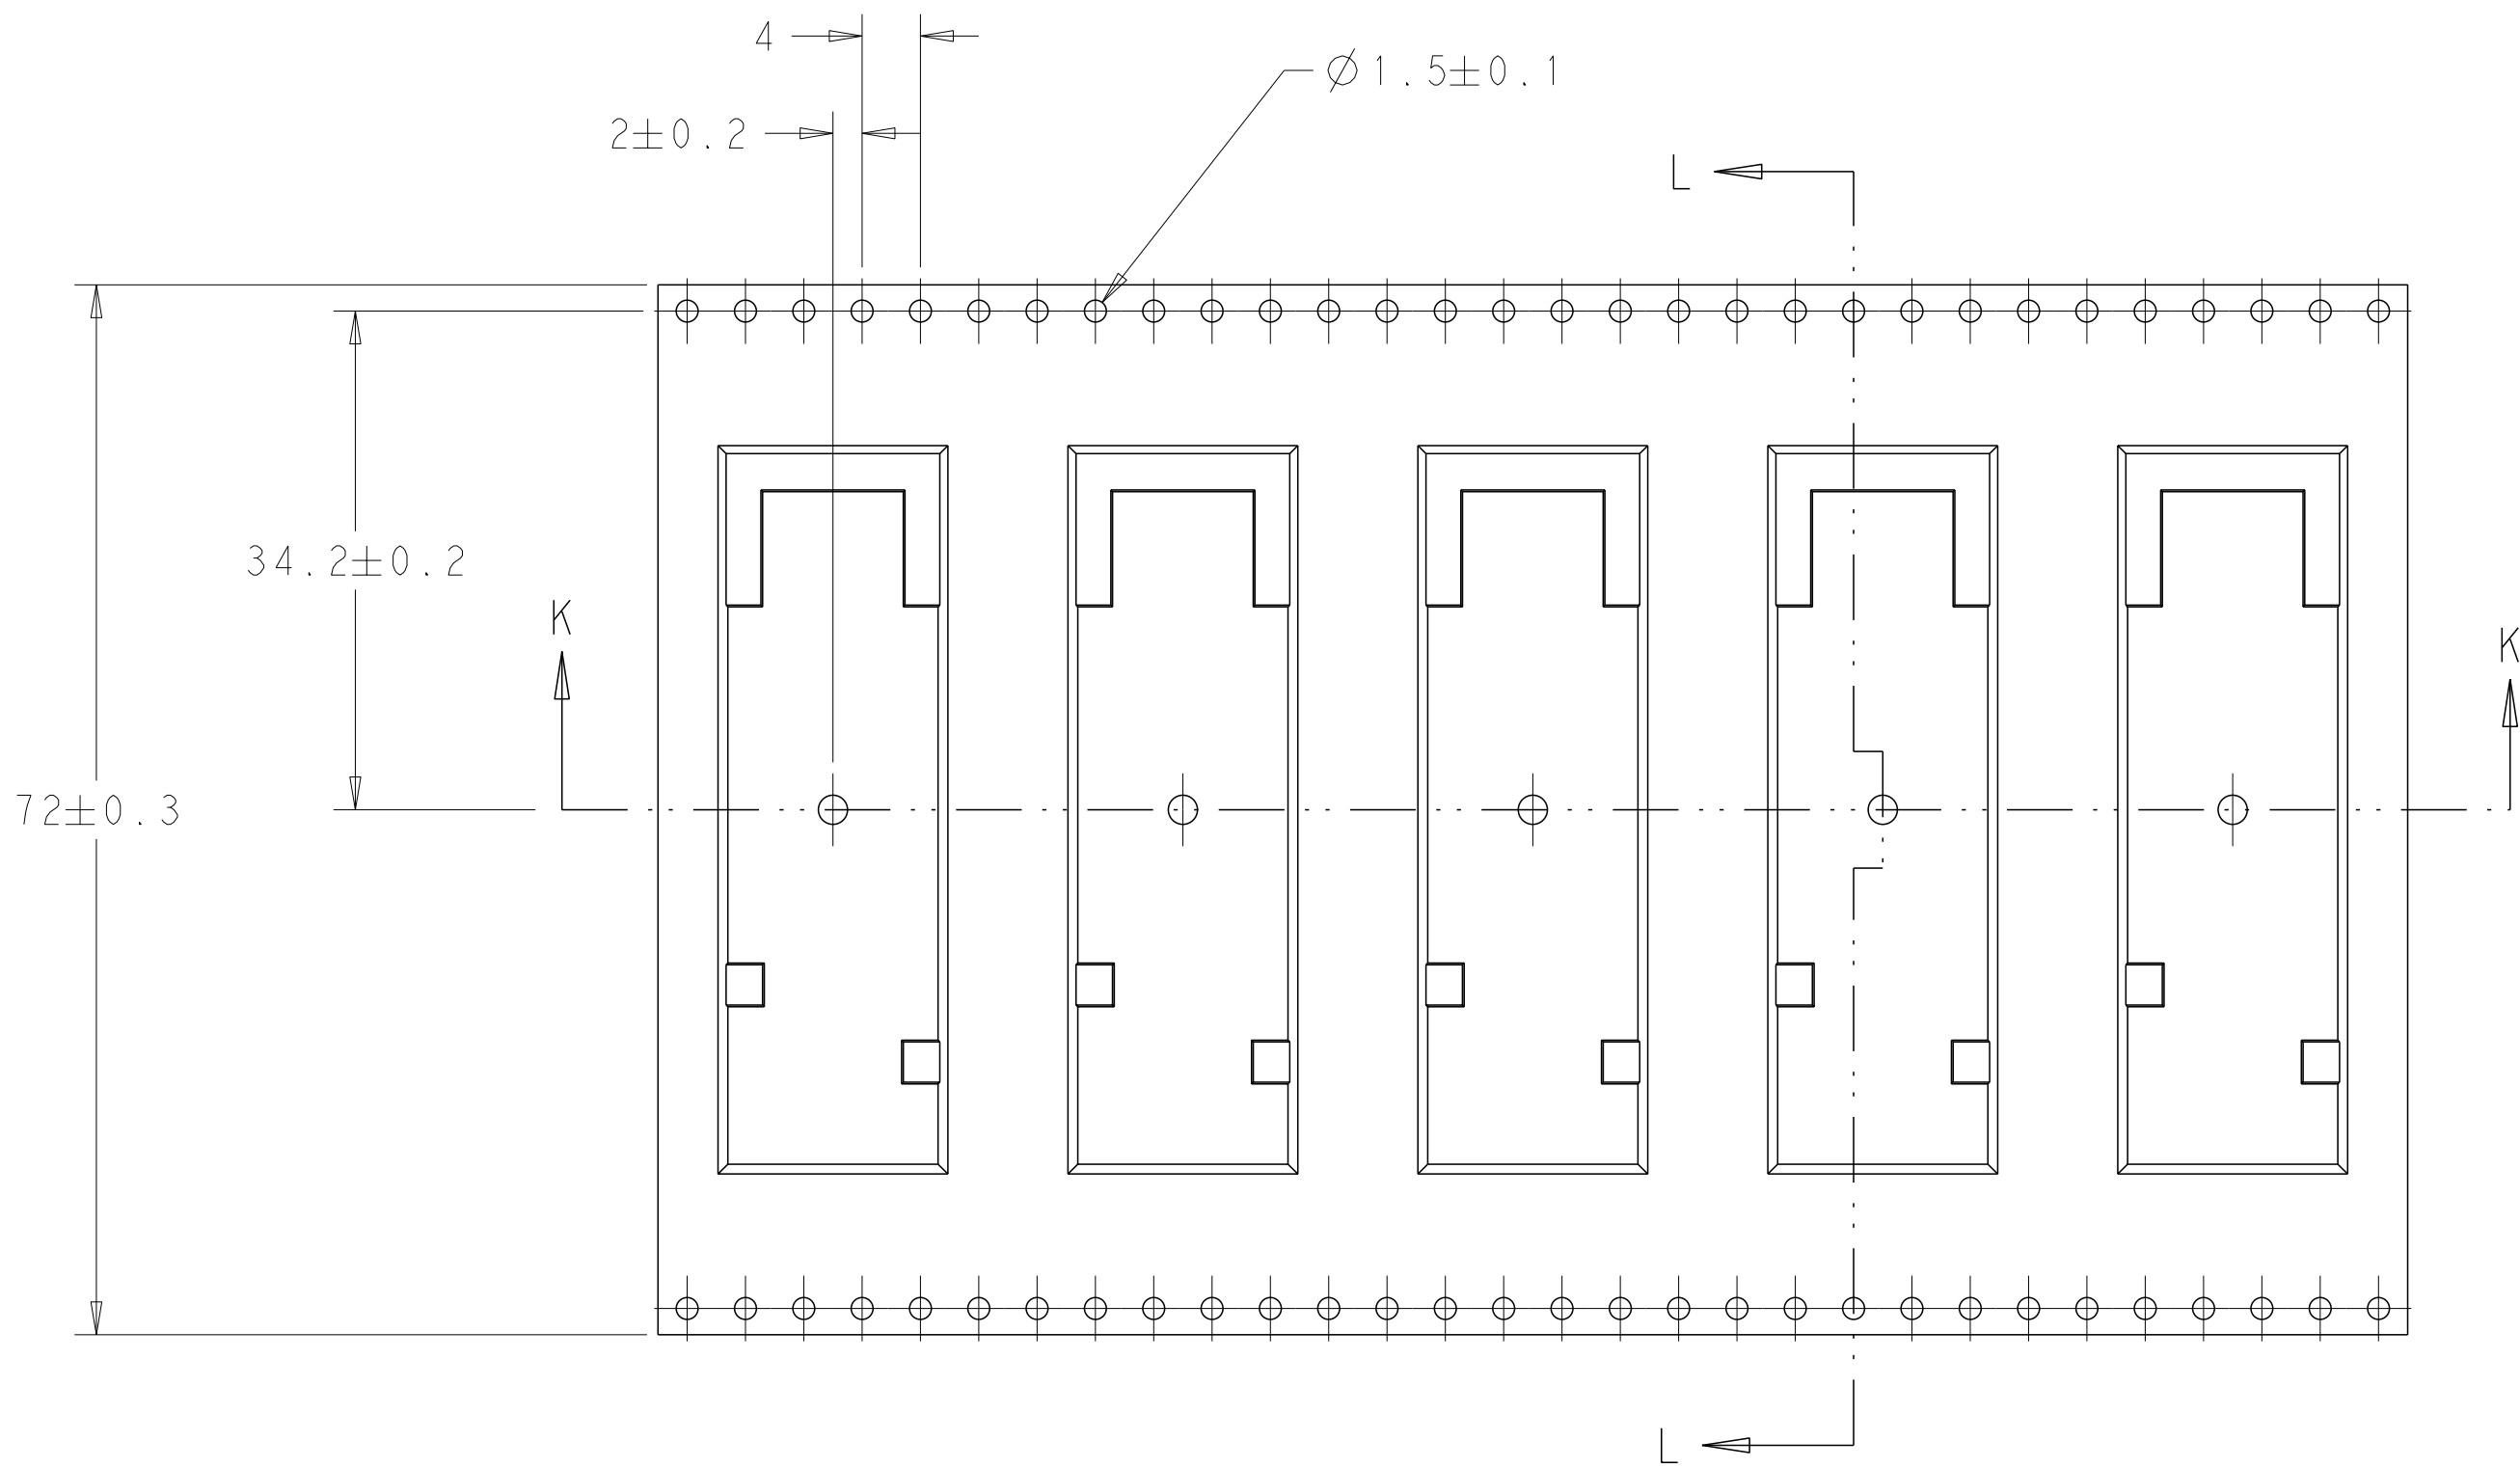


SECTION L-L

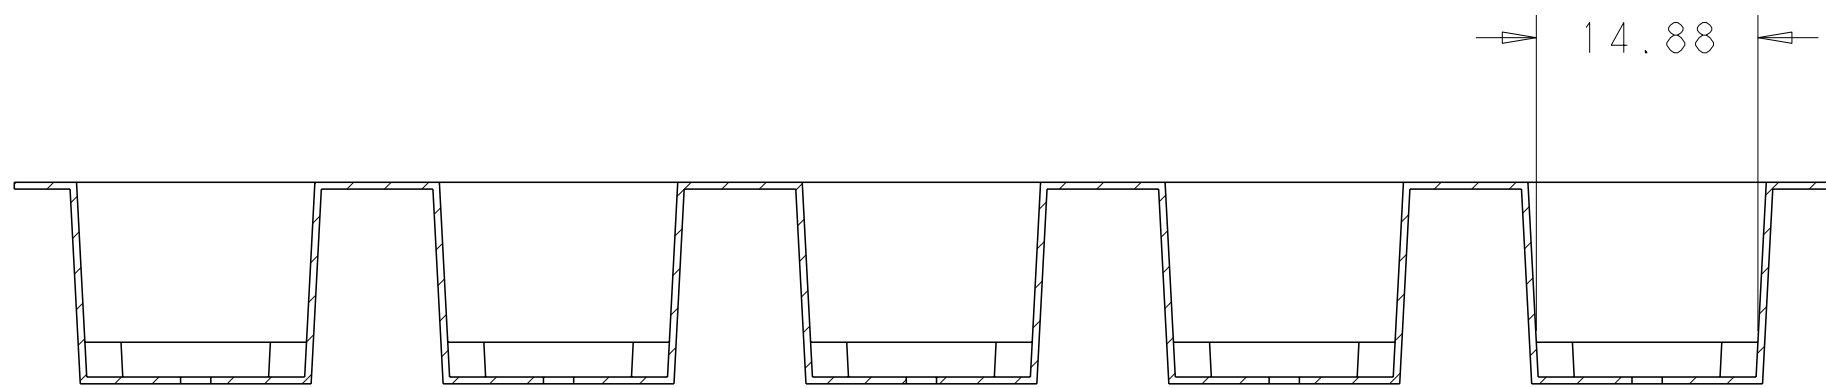



SECTION K-K
SCALE 2:1

2227303-2 / 1-222303-2 REEL PACKAGING

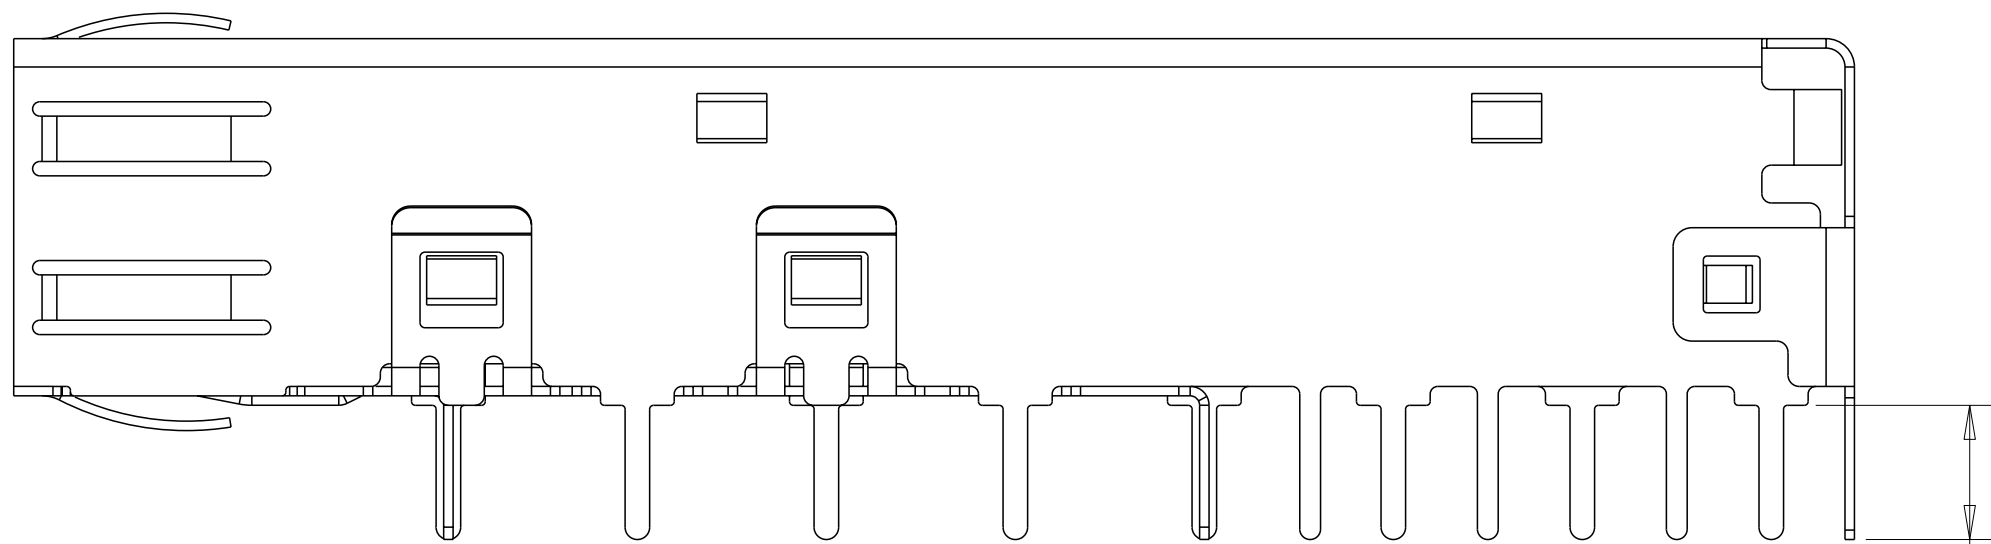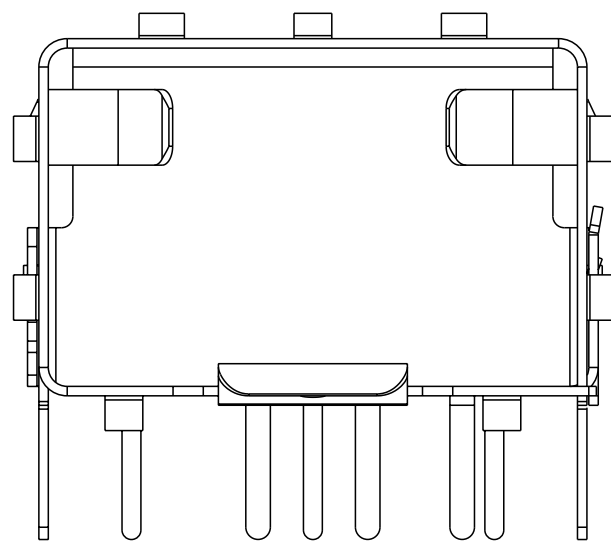

(A)
APPLIED ALL PINS

2227303-7
UNMARKED DIMENSIONS SAME AS 2227303-1
SCALE 5:1

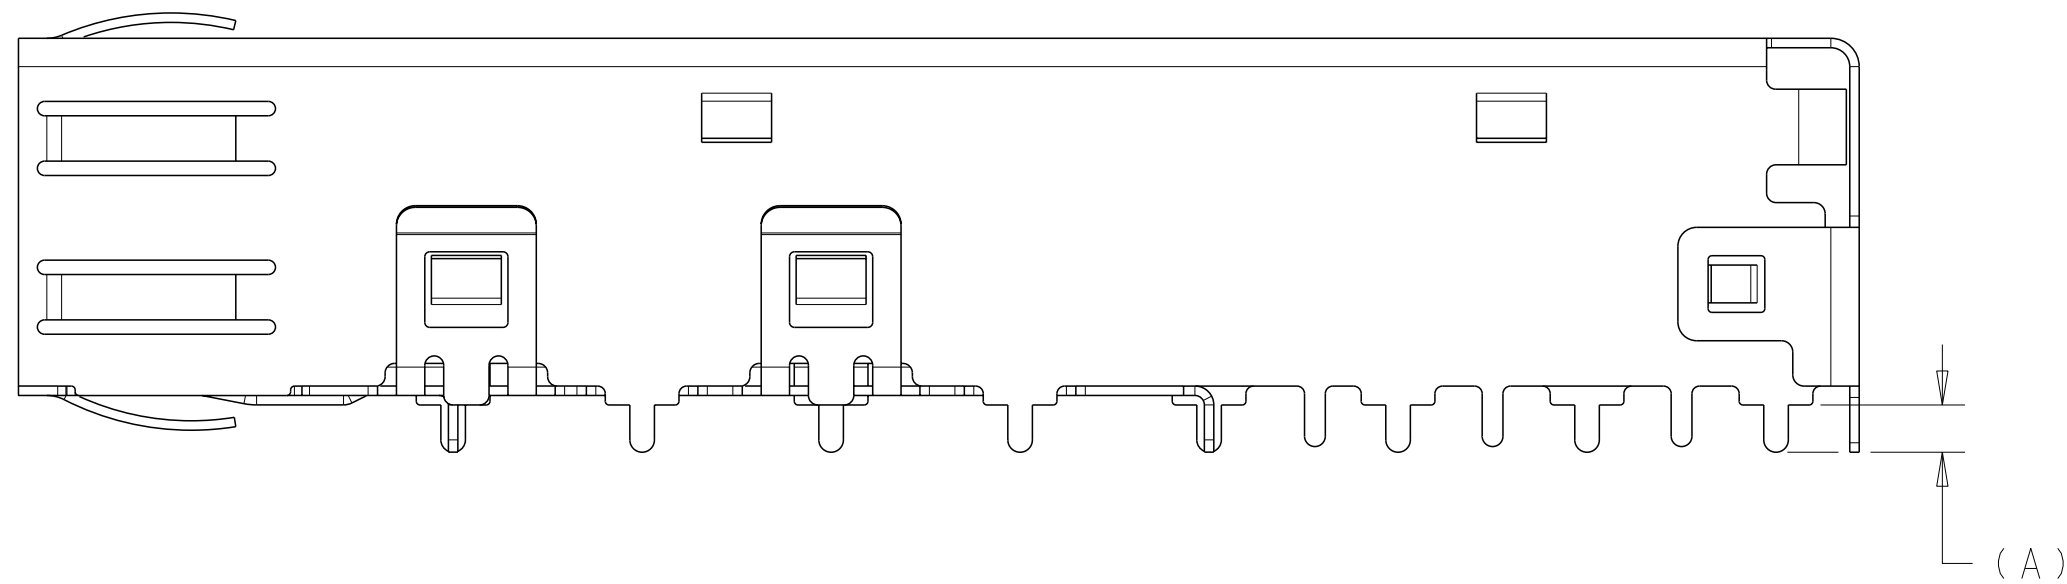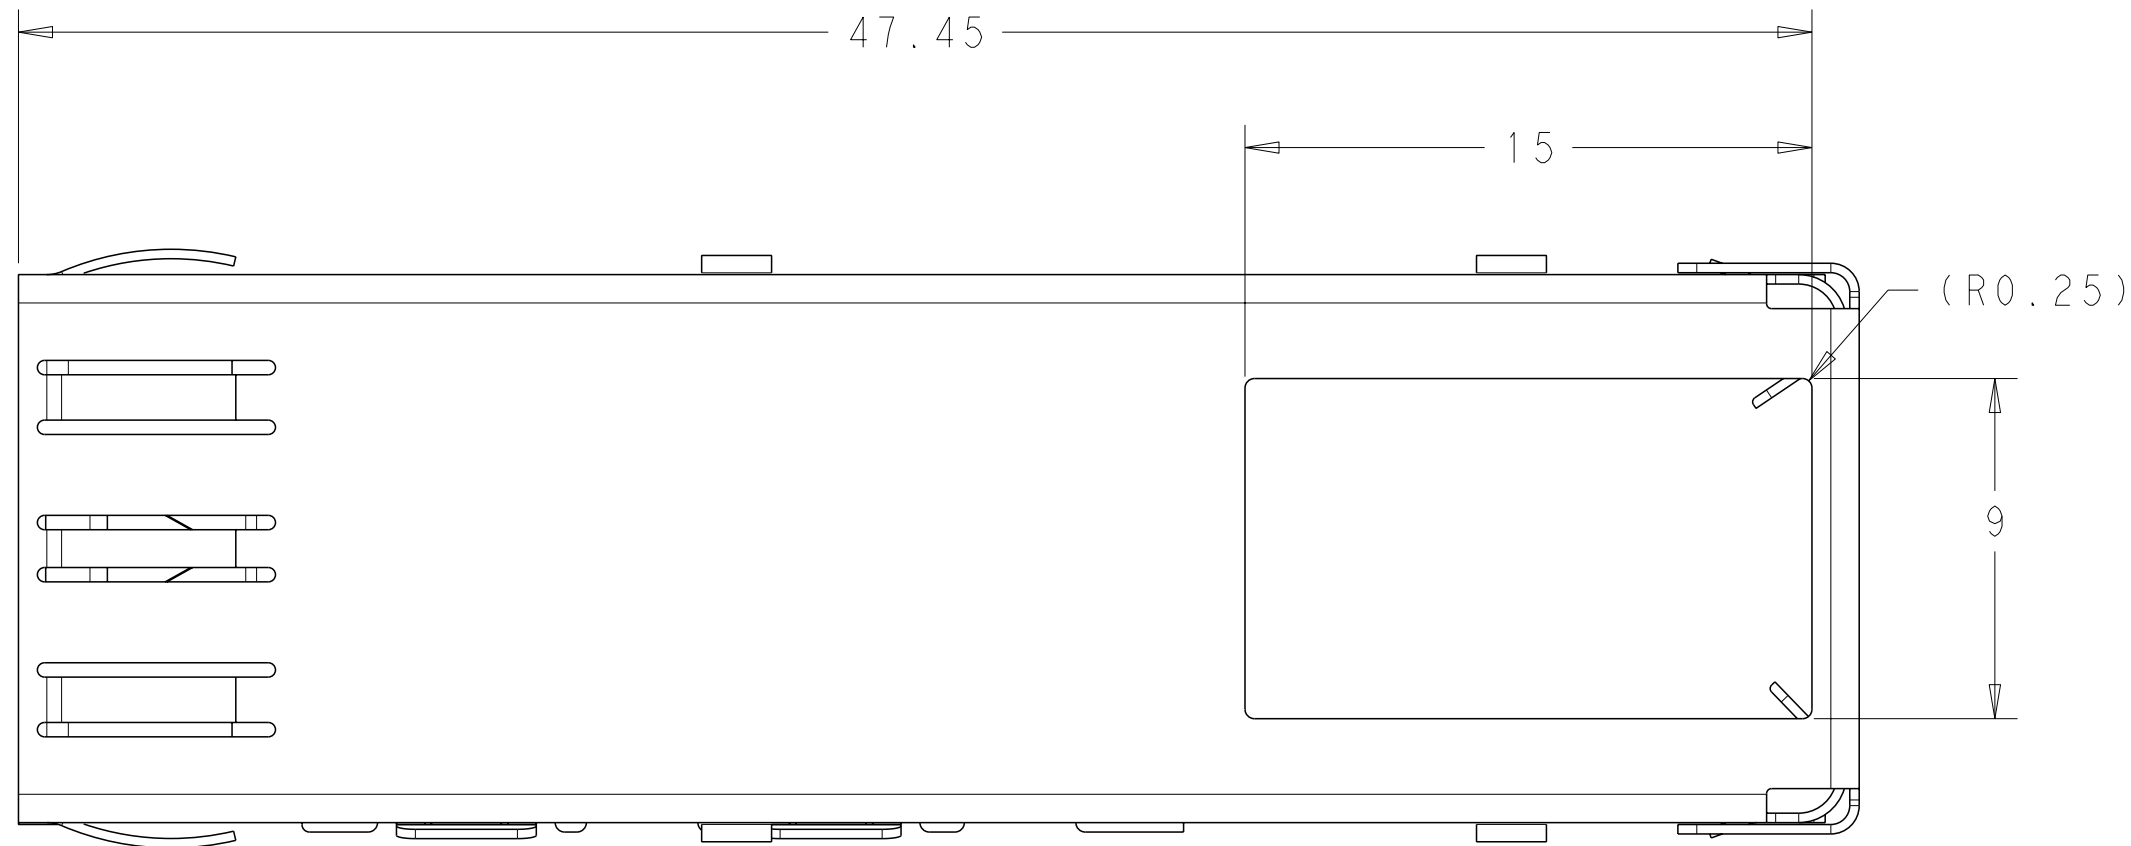

2-2227303-2 AS SHOWN
UNMARKED DIMENSIONS SAME AS 2227303-1
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009				DWN C. VALENTINE 19OCT2012	TE Connectivity			
DIMENSIONS: mm				CHK M. SCHMITT 19OCT2012				
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD M. SCHMITT 19OCT2012	NAME SFP, 1X1 SINGLE PIECE CAGE, SOLDER PIN			
0 PLC ±0.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±0.1 4 PLC ±0.1				PRODUCT SPEC 108-1950 APPLICATION SPEC 114-13120	SIZE A100779			
MATERIAL -				WEIGHT -	CAGE CODE 2227303			
FINISH -				Customer Drawing	RESTRICTED TO -			
				SCALE 6:1	SHEET 3 OF 3			
					REV C3			