
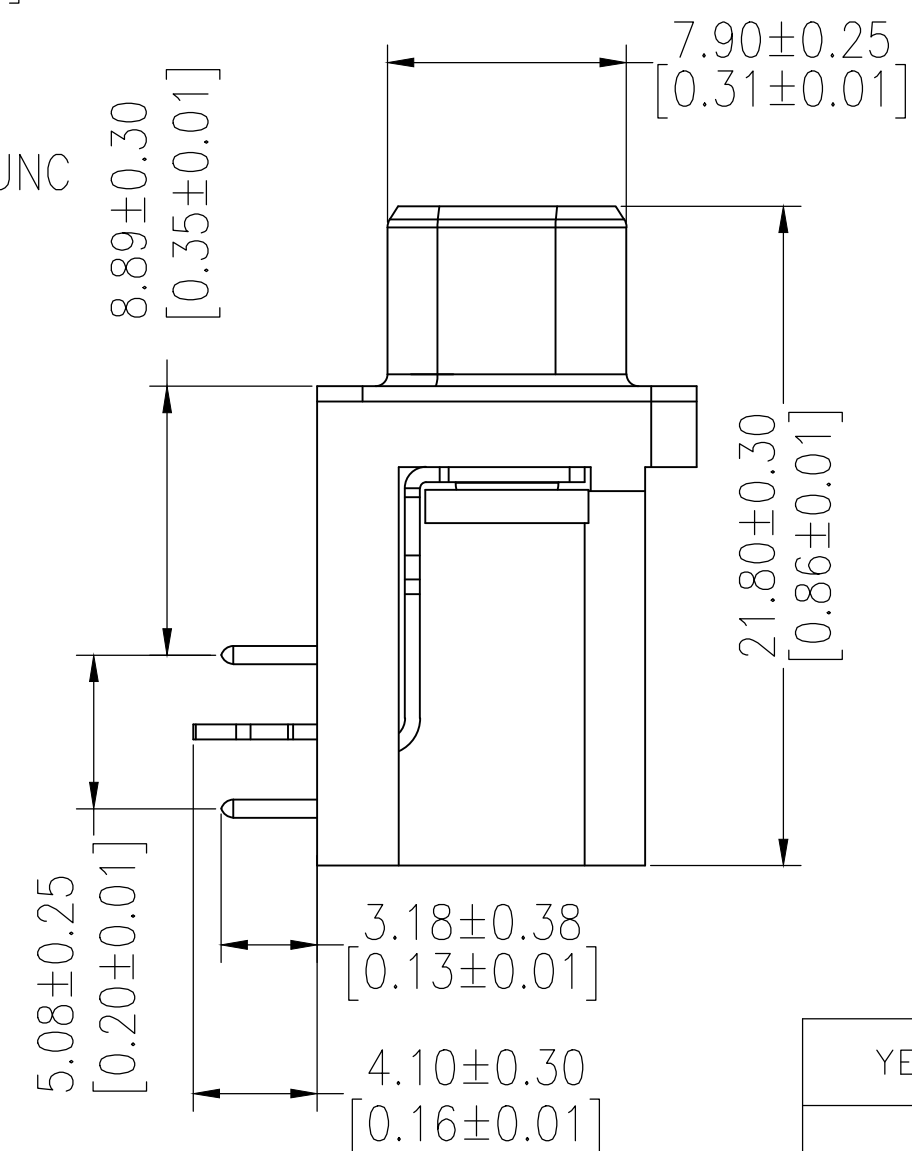
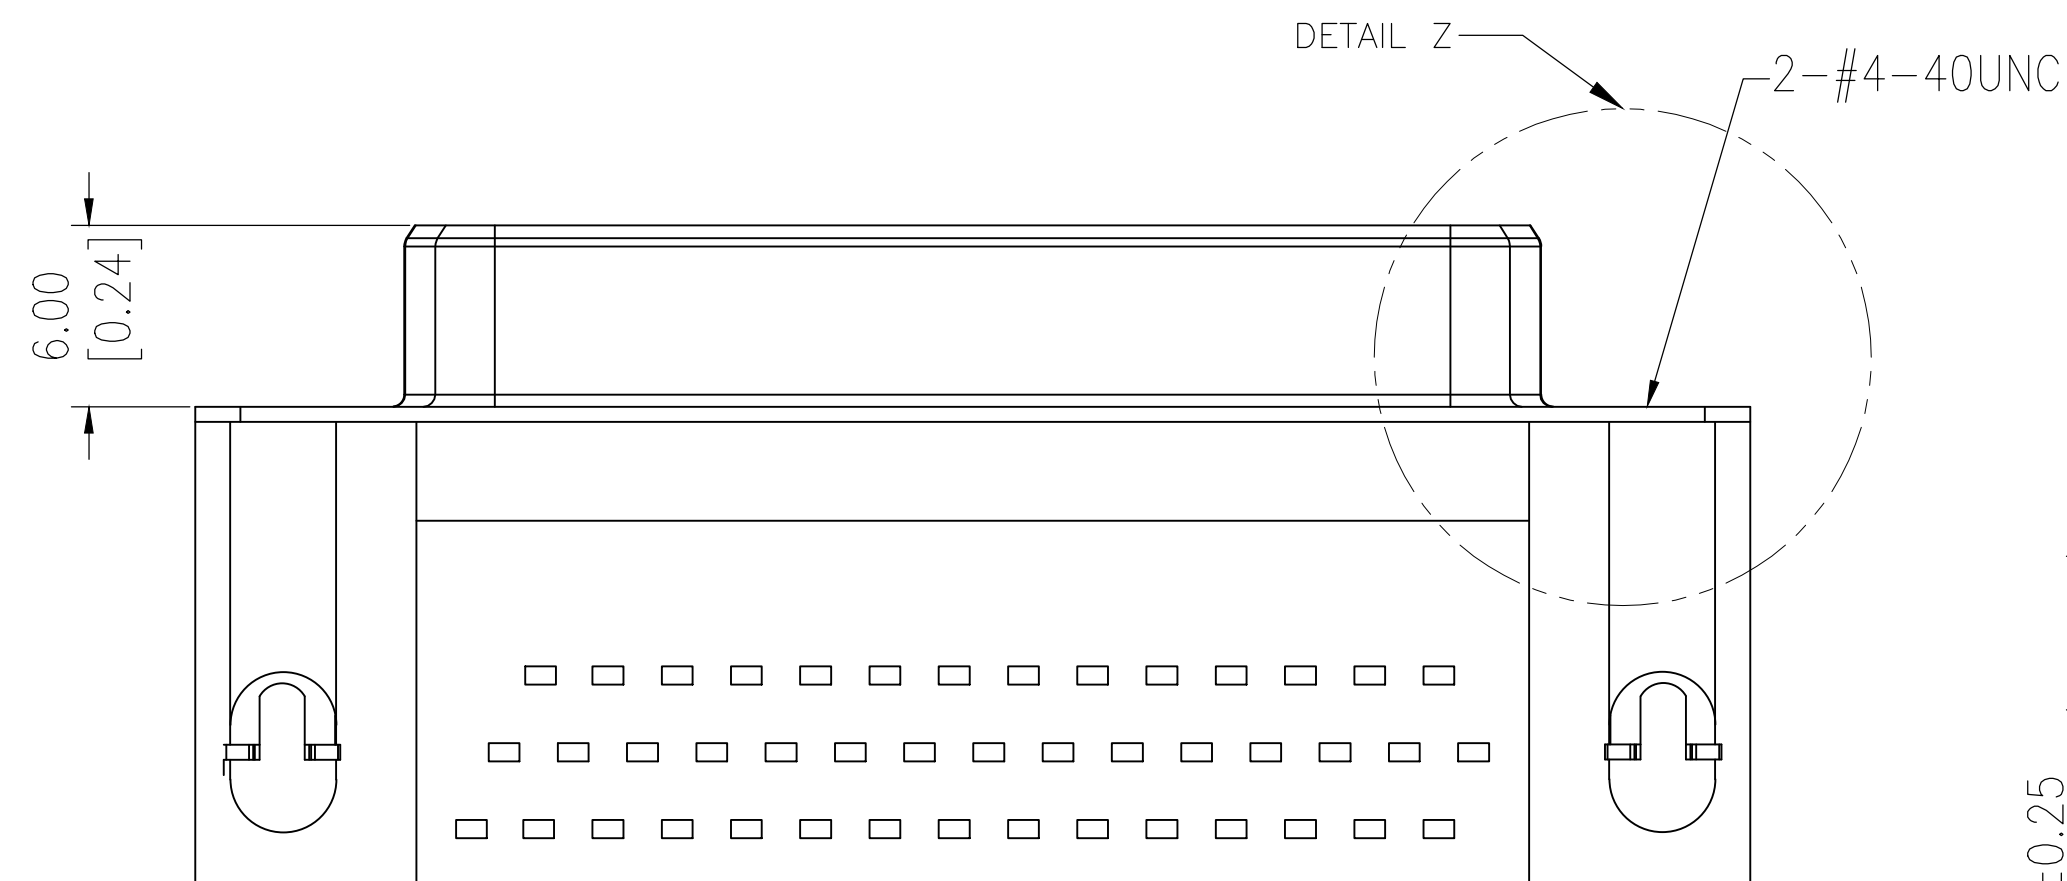


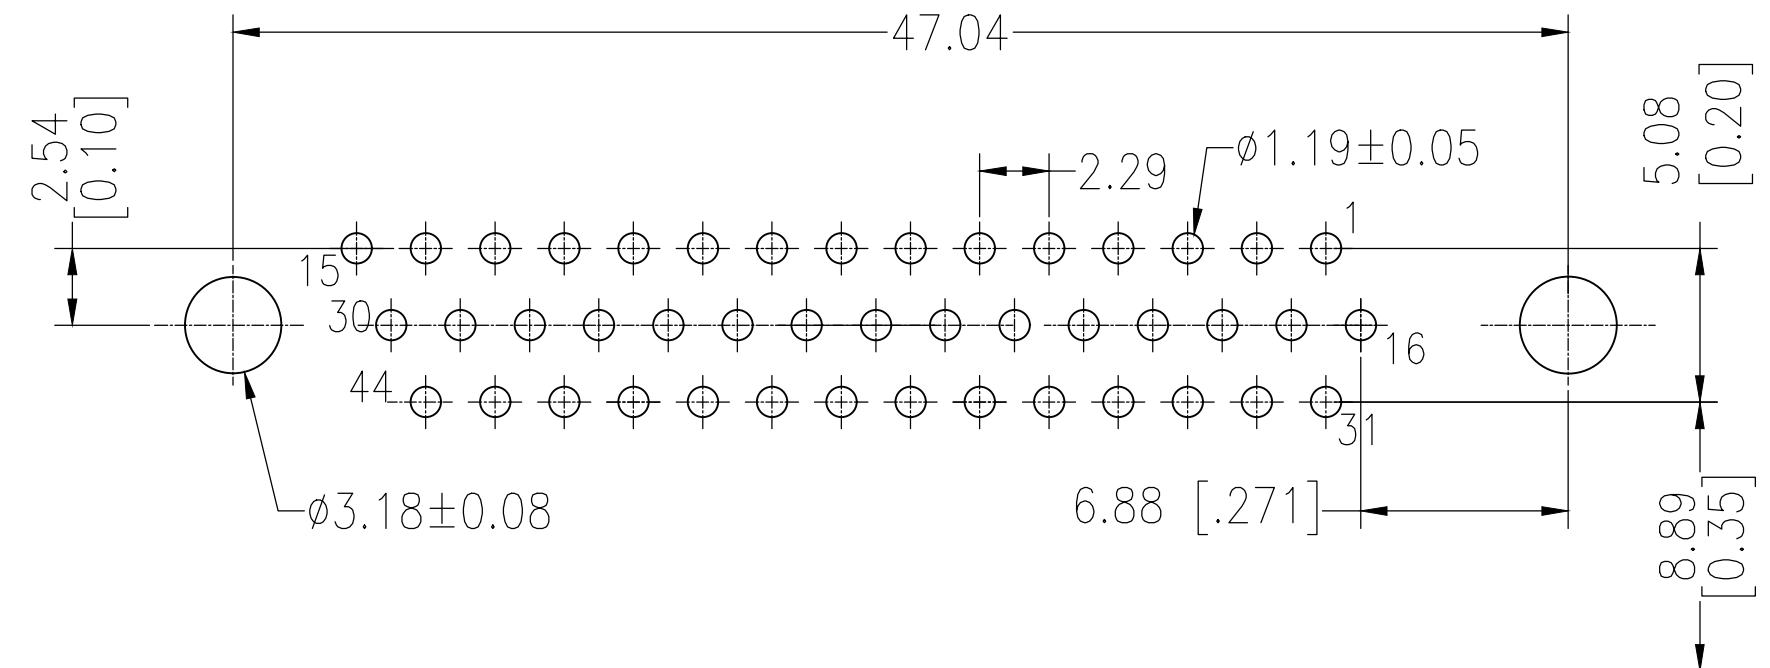


NOTES:

Insulator:PBT+G.F UL94V-O BLACK
Contact:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATED OVERALL
Holddown:Brass,100u" TIN OVER 50u" NICKEL
Steel:Cold Roller Steel,Ni Plated
Rivetlock:Brass,Nickel Plated

LOT NUMBER "XXXX"

└─ Stands For Calendar Year

└─ Stands For Week Number

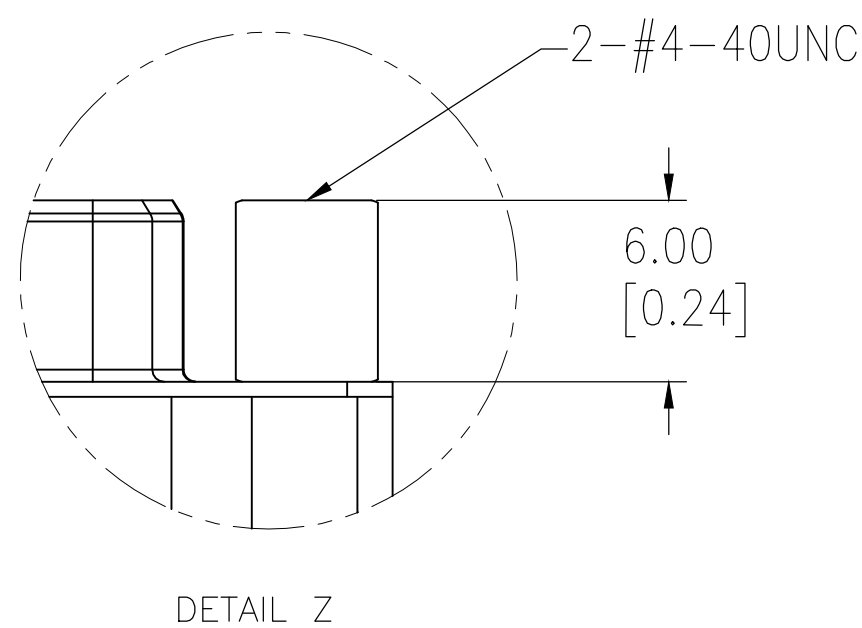

YES SEE DETAIL Z	15μ"Au	2311770-2
THREADED	30μ"Au	2311770-1
SCREW LOCK	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AJITH PAI 13MAR2017 CHK DANIEL GORENC 13MAR2017 APVD DANIEL GORENC 13MAR2017		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 44P	
		PRODUCT SPEC 108-130023 APPLICATION SPEC -		SIZE A2	
MATERIAL -		FINISH -		CAGE CODE 00779	
		WEIGHT		DRAWING NO C-2311770	
CUSTOMER DRAWING				RESTRICTED TO -	
				SCALE 1:1 SHEET 1 of 1 REV F	