

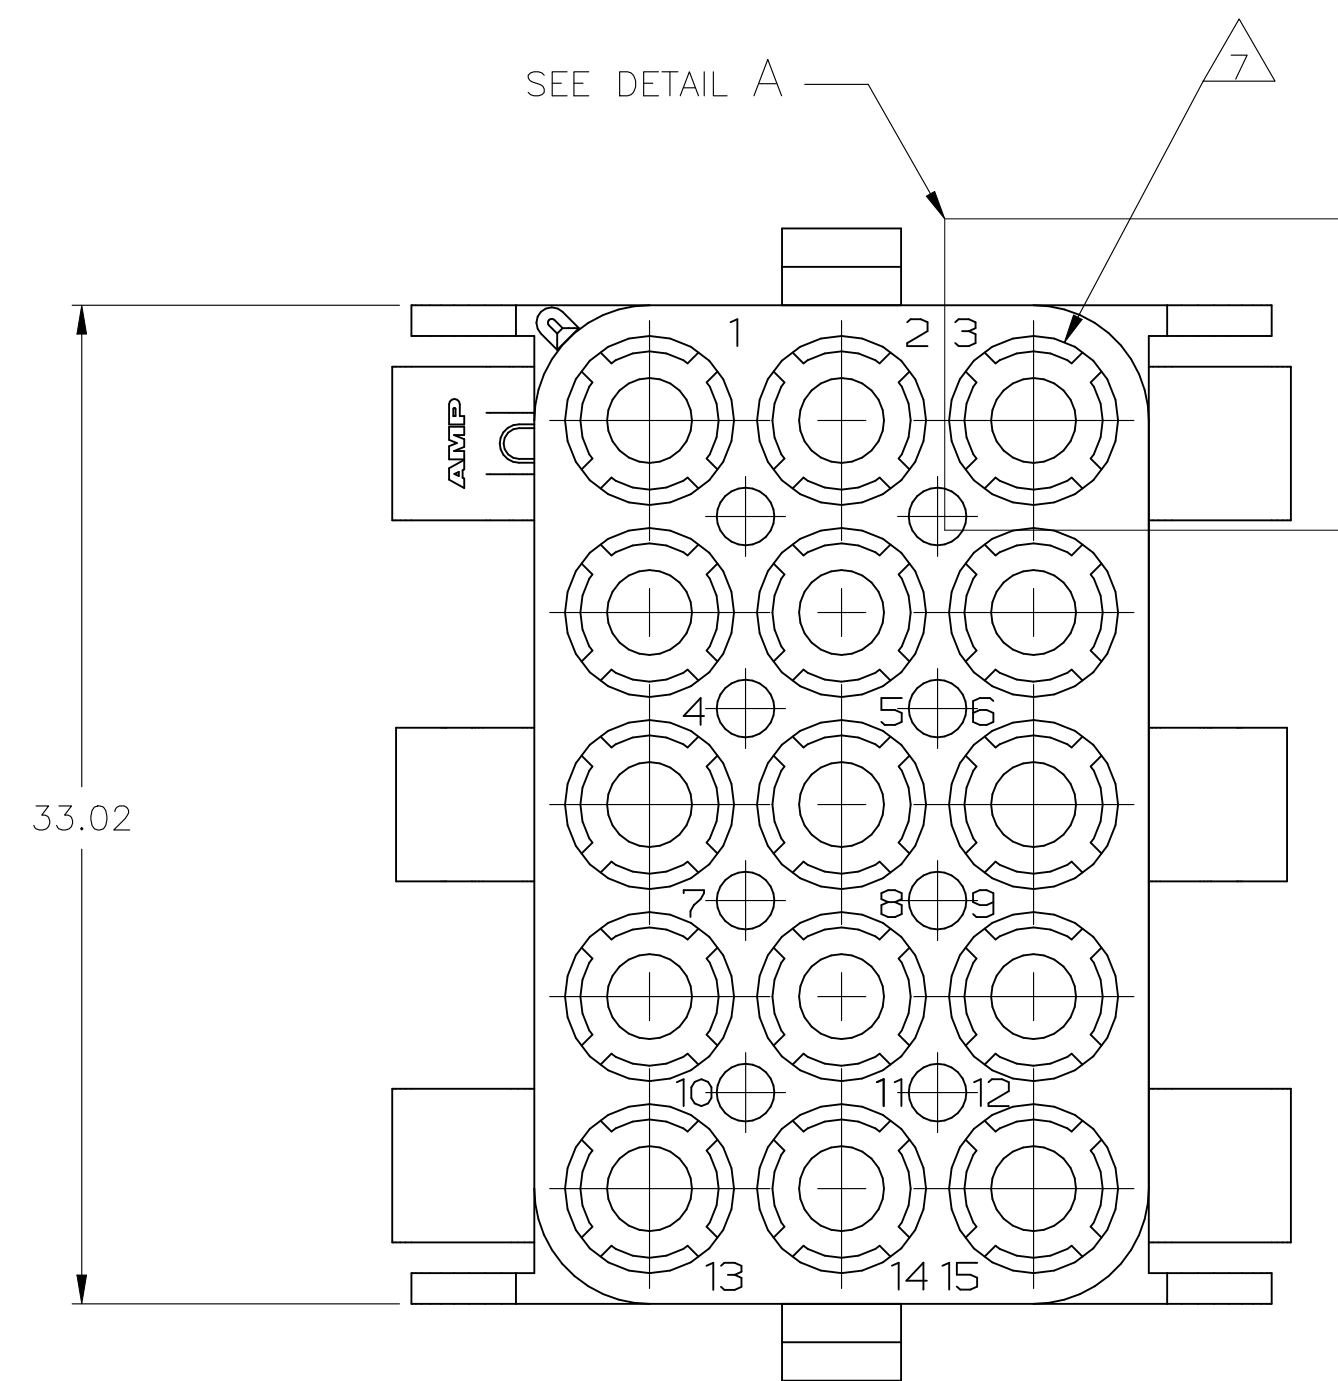
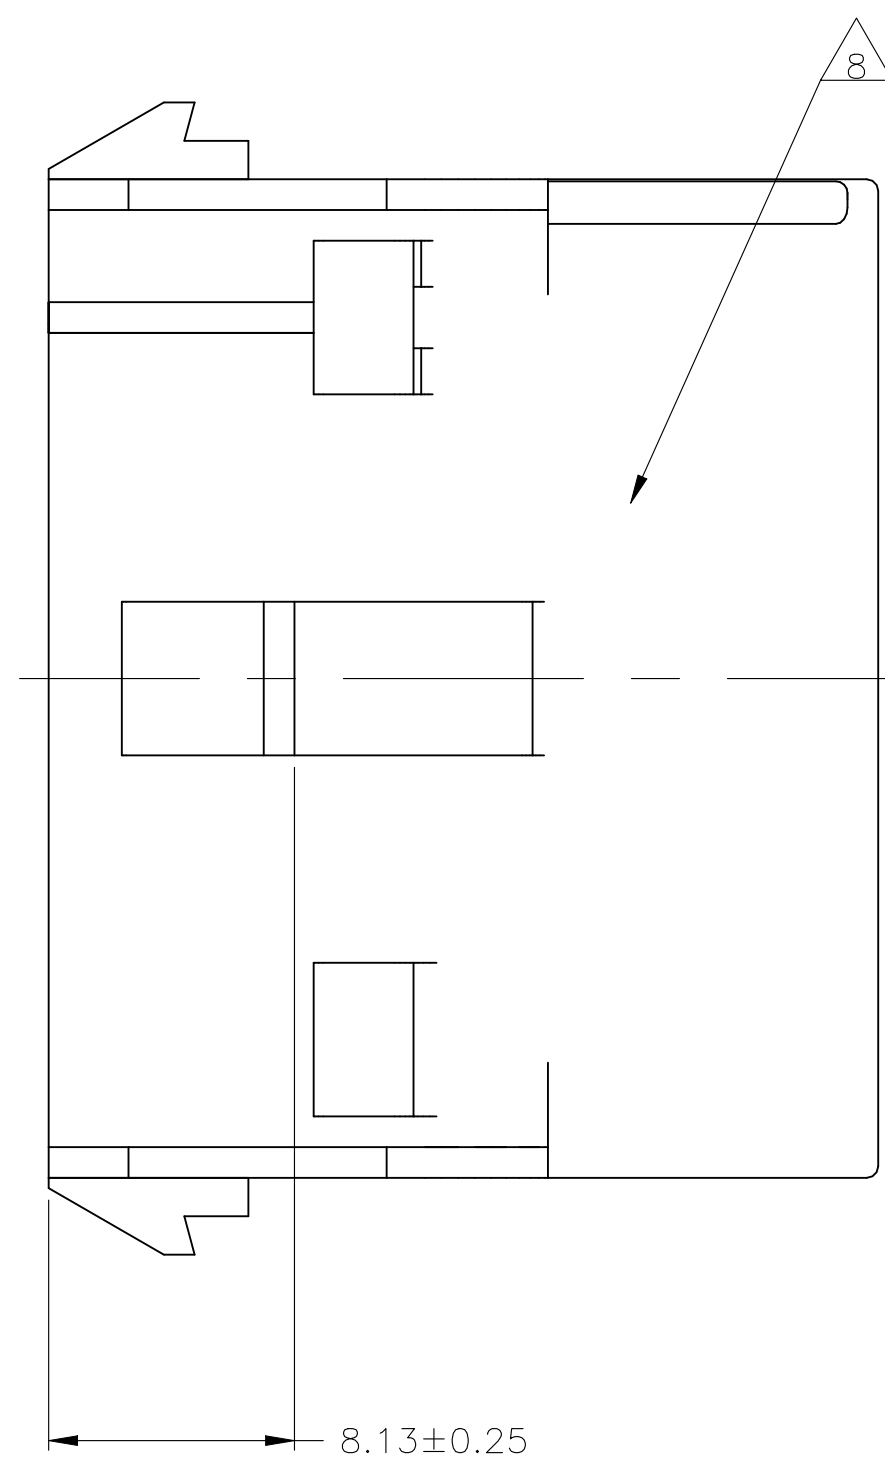
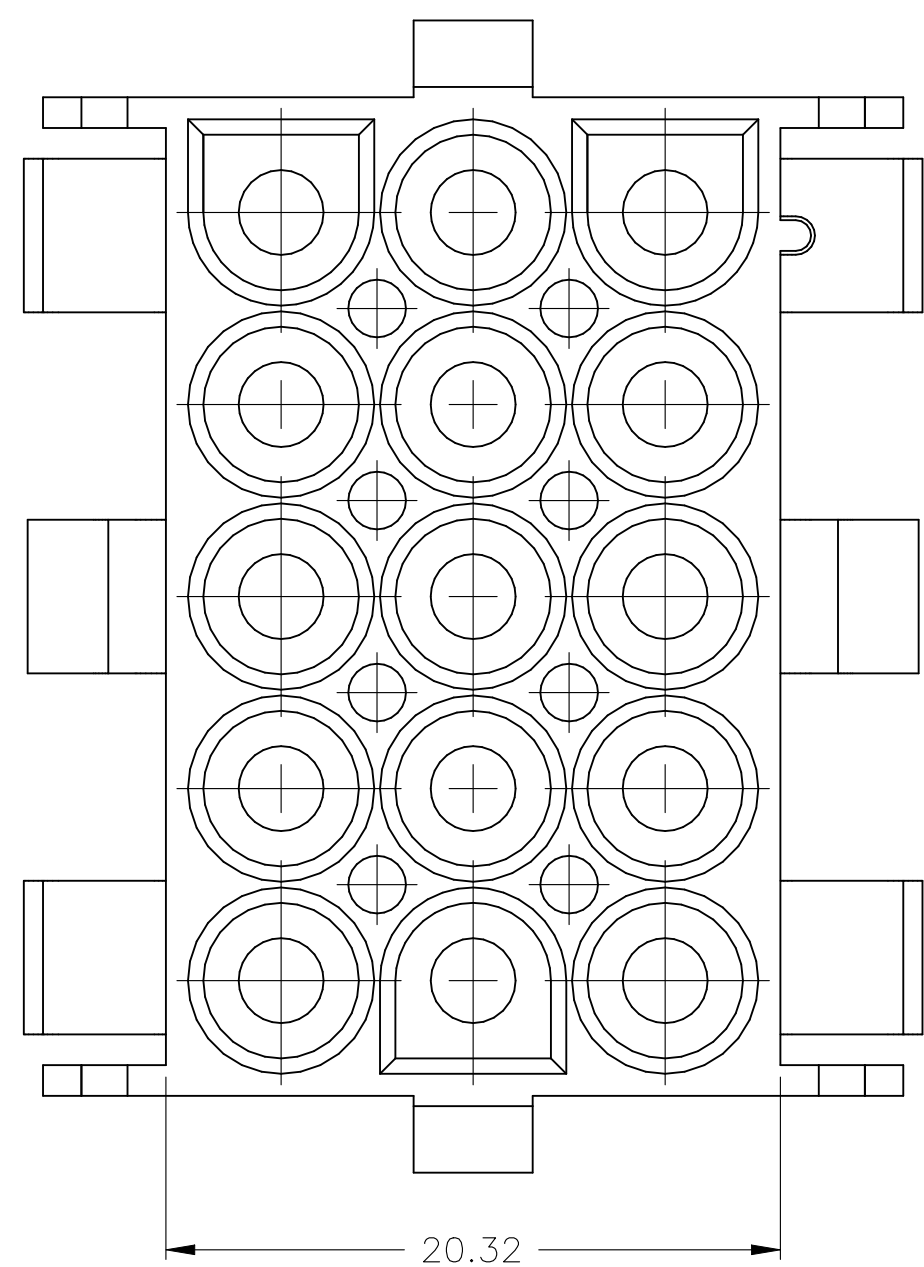
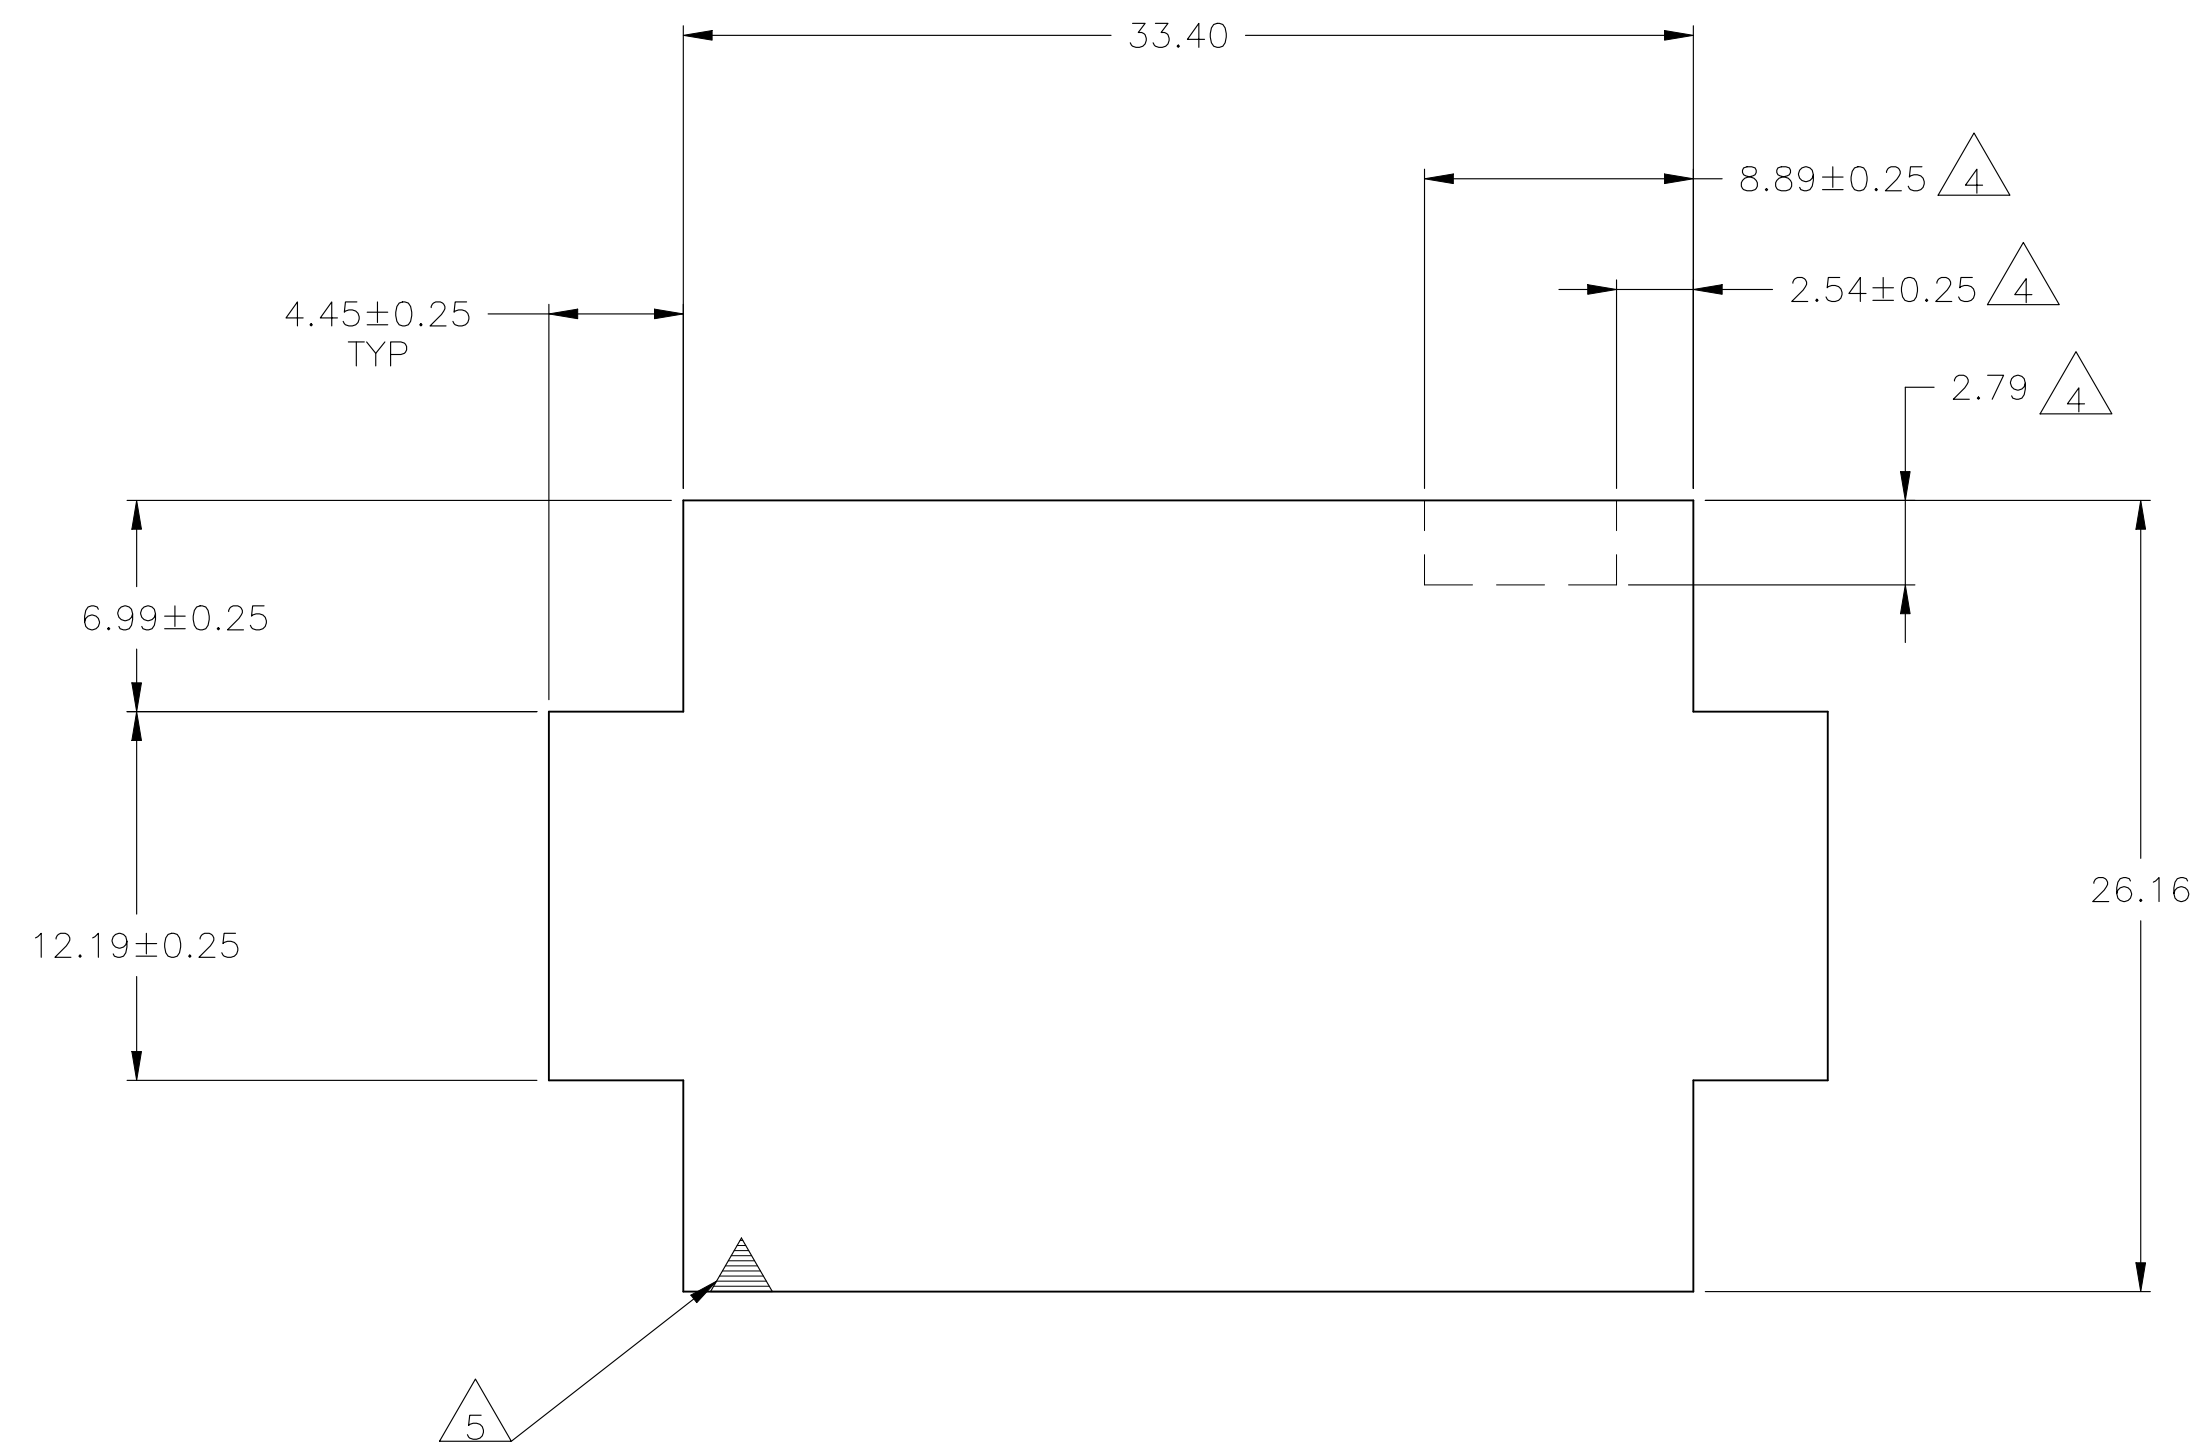



LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVD
			V	REVISED PER ECR-21-100621	15APR2021	PC	JS

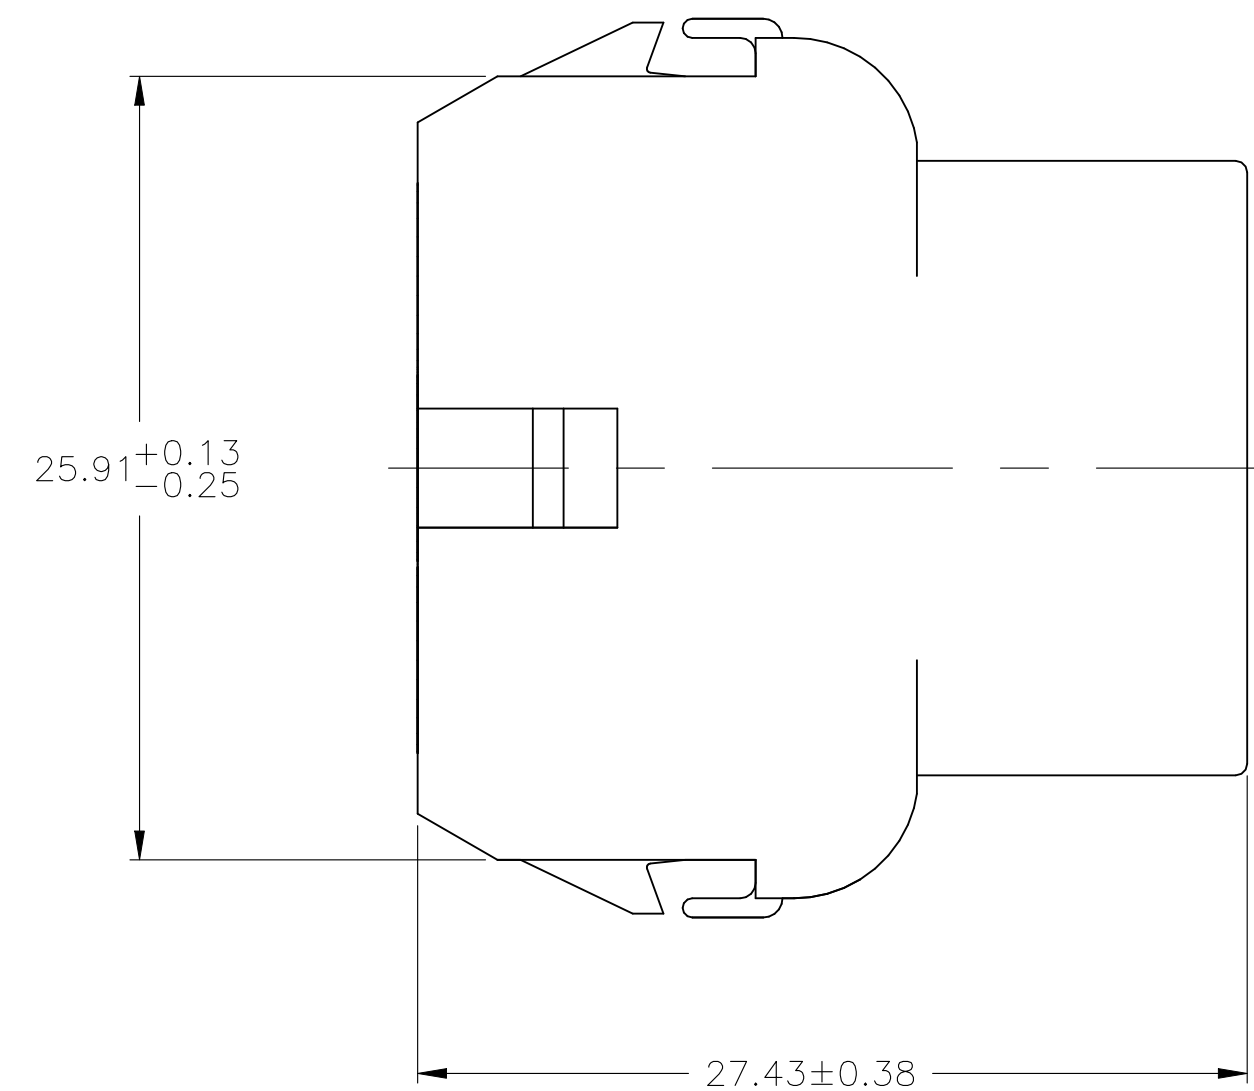

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

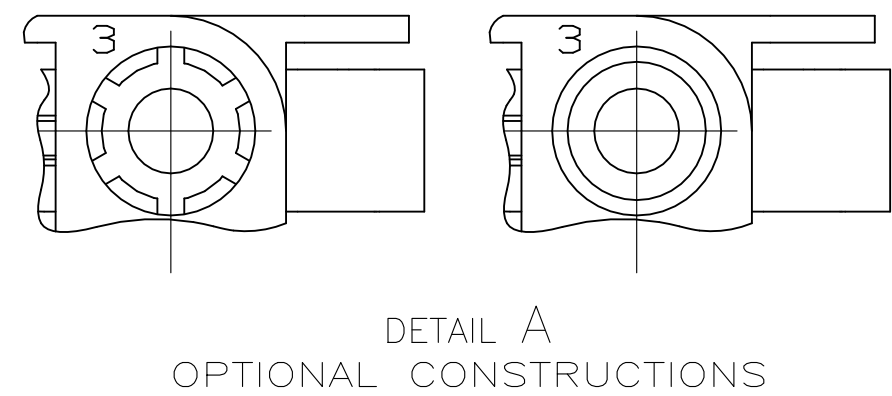


RECOMMENDED PANEL CUT OUT

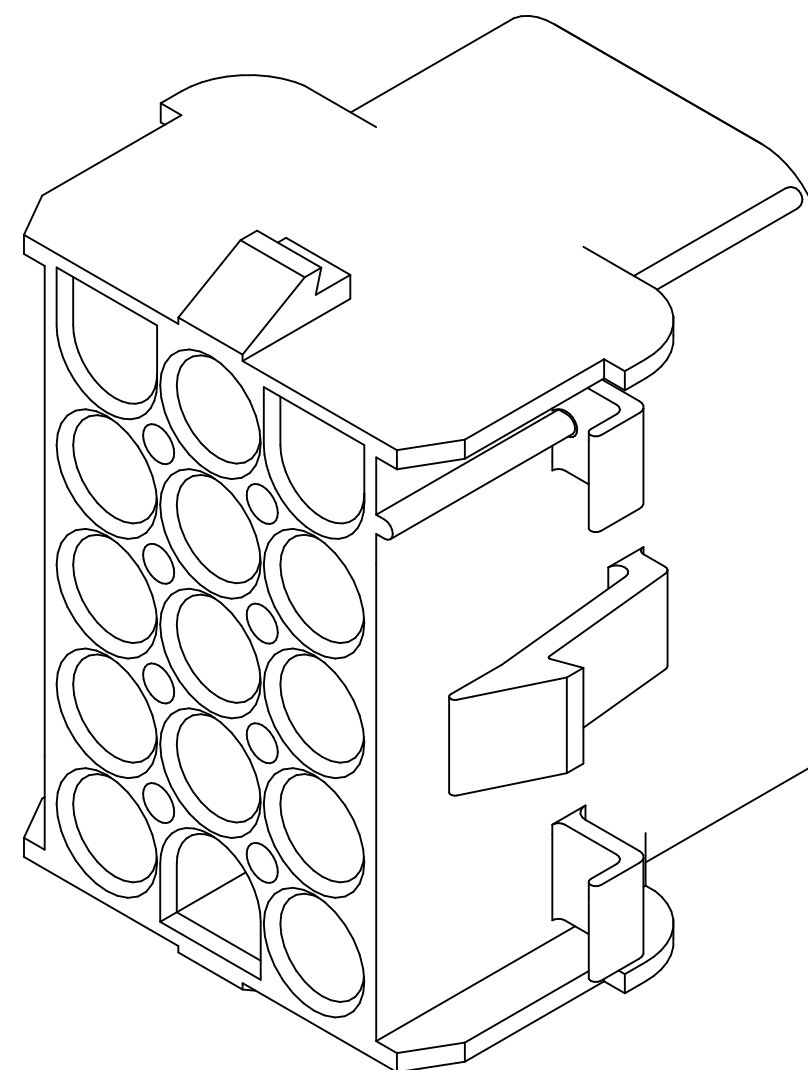

6.99	.275	33.40	1.315
4.45	.175	33.02	1.300
2.79	.110	27.43	1.080
2.54	.100	26.16	1.030
2.29	.090	25.91	1.020
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.89	.350
0.13	.005	8.13	.320
MM	IN	MM	IN

CONVERSION TABLE

	BLACK	1-350784-9
OBSOLETE	-GRAY	1-350784-8
OBSOLETE	-BLUE	1-350784-6
OBSOLETE	-GREEN	1-350784-5
OBSOLETE	-YELLOW	1-350784-4
OBSOLETE	-ORANGE	1-350784-3
OBSOLETE	-RED	1-350784-2
OBSOLETE	-BROWN	1-350784-1
	NATURAL	350784-1
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 28MA992 CHK R. SWING 28MA992 APVD D. SELF 28MA992		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 2 PLC ± - 3 PLC ± 0.13 4 PLC ± - 5 ANGLES ± 10°		NAME CAP.15 CIRCUIT, UNIVERSAL MATE-N-LOK™ -	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A1	
MATERIAL NYLON,UL 94V-0		FINISH -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C-350784	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV V	