

# ATP19 Series Anti-Vandal Sealed Pushbutton Switch

## Features/Benefits

- Momentary or Lock version
- IP67 sealed & IK10 (Stainless steel bushing)
- Capable of up to 3A resistive load
- 50,000 life cycle at full load
- Various colors of LED illuminate indicator
- Choices of pushbutton with symbol on spot, ring or power logo

## Typical Applications

- Control Panels including car park and traffic light
- Industrial Instruments
- Lifts / Escalator
- Communication equipment
- Alarm, safety and security systems



C&K US

## Specifications

FUNCTION: Single pole and double poles  
CONTACT ARRANGEMENT: N.O. and N.C.  
MOUNTING TYPE: Threaded front panel mount  
TORQUE FOR THREADED BODY: 5-14 Nm

## Mechanical

OPERATING LIFE: Momentary 1,000,000 cycles  
Self-lock 500,000 cycles  
TOTAL TRAVEL: about 3.2 mm  
OPERATING FORCE: 1 pole  $2.5 \pm 1N$   
2 pole  $3.5 \pm 1N$

## Electrical

CONTACT RATING: lth 5A/250VAC  
3A / 250VAC  
3A / 28VDC  
OPERATING LIFE: 50,000 make-and-break cycles at full load  
DIELECTRIC STRENGTH: 2,000 V RMS @ sea level  
INSULATION RESISTANCE: 1,000 M $\Omega$  min. @ 500 VDC  
INITIAL CONTACT RESISTANCE : 50 m $\Omega$  max @1A 12VDC

## Materials

BUSHING: Stainless steel / Nickel plated brass / Aluminum alloy  
BASE: PBT (UL 94-A0), PC (UL 94-V2)  
ACTUATOR: PC (UL 94-V2); Stainless steel / Nickel plated brass / Aluminum alloy  
INTERNAL ASSEMBLY: POM / PA66  
SPRING: Steel  
SEALING / O-ring: Silicone  
TERMINALS: Brass with silver or gold plated  
CONTACT: Copper, silver plated

## Operating Environment

OPERATING TEMPERATURE: -20°C to +55°C  
SEALING / PROTECTION: IP67 / IK10 (Stainless steel bushing)

**NOTE:** Specifications and materials listed above are for switches with standard options.  
For information on specific and custom switches, please contact Customer Service.

## Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box.

A	T	P	1	9															
---	---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Designation \_\_\_\_\_  
ATP19 Series

### Actuator Style

- S** Standard
- R** Raised #
- D** Dome without LED only ###

### Actuator Indicator

- L0** Without LED \*
- L1** Fix ring \*
- L2** Spot \*
- L3** Moving ring \* (standard actuator only)
- L4** Power logo \*\*
- L5** Moving ring & Power logo \*\* (standard actuator only)

### LED Illumination

Color	Dual color
<b>0</b> Without LED	<b>A</b> Red & Green
<b>2</b> White	<b>B</b> Red & Blue
<b>3</b> Red	<b>D</b> Blue & Yellow
<b>5</b> Yellow	<b>G</b> Red & Yellow
<b>6</b> Green	<b>H</b> Green & Yellow
<b>7</b> Blue	<b>J</b> Orange & Green

### LED voltage (20mA)

- 00** Without LED
- 03** 3V
- 06** 6V
- 12** 12V
- 24** 24V
- 36** 36V
- A1** 110V AC
- A2** 220V AC

### Terminal plating

- Q** Silver
- G** Gold

### Termination

- 03** STD solder lug
- 04** Short solder lug
- W1** Wire lead 500mm \*\*\*
- W2** Wire lead 1,000mm \*\*\*

### Mechanical function

- A** Momentary
- E** Lock

### Contact arrangement

- S** SPDT
- D** DPDT

### Bushing type

Round	Double D shape
<b>B0</b> Stainless (Natural)	<b>M0</b> Stainless (Natural)
<b>B3</b> Al alloy (Black anodized) ##	<b>M3</b> Al alloy (Black anodized) ##

\* Available on round bushing only

\*\* Available on double D-shape bushing only

\*\*\* Available upon request, please contact your sales representative for details

# Come in B0 & M0 with L1 or L4 indicator only

## Come in S style actuator only & no L5 indicator

### Without LED & for B0 & M0 bushing type only



Third Angle  
Projection

Dimensions are shown: mm (inches)  
Specifications and dimensions subject to change



17 Mar 23




# ATP19 Series Anti-Vandal Sealed Pushbutton Switch


Pushbutton  
A

## STANDARD VIEW

ROUND BUSHING

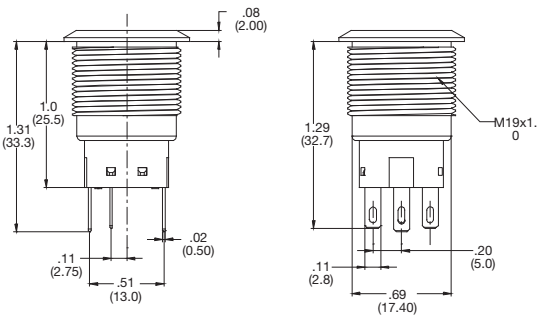


DOUBLE-D BUSHING

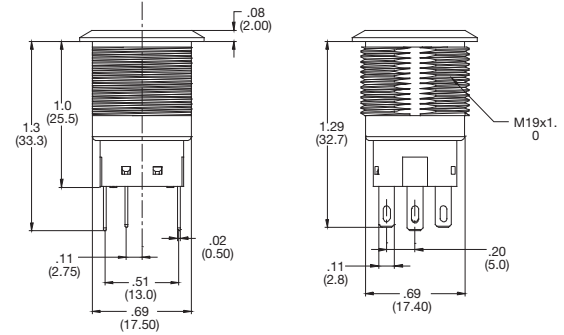


## ACTUATOR STYLE


**S** STANDARD



**R** RAISED




**D** DOME




## ACTUATOR INDICATOR


**L0** WITHOUT LED




**L1** FIX RING




**L3** MOVING RING




**L2** SPOT

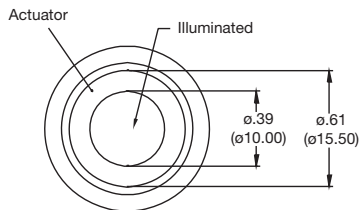

**L4** POWER LOGO




**L5** POWER & MOVING RING




# ATP19 Series Anti-Vandal Sealed Pushbutton Switch

## CIRCUIT


SPDT




SPDT - SINGLE COLOR LED




SPDT - DUAL COLOR LED




DPDT



DPDT - SINGLE COLOR LED




DPDT - DUAL COLOR LED




## TERMINATION



**03** SOLDERLUG

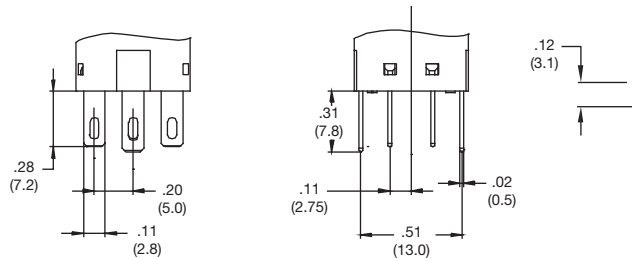

**04** SHORT SOLDER LUG

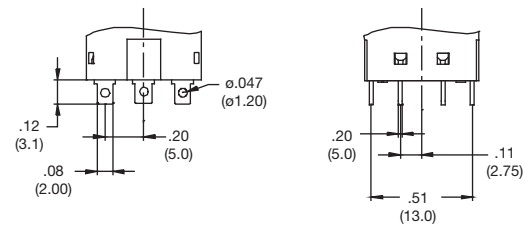


**W1 OR W2** WIRE LEAD

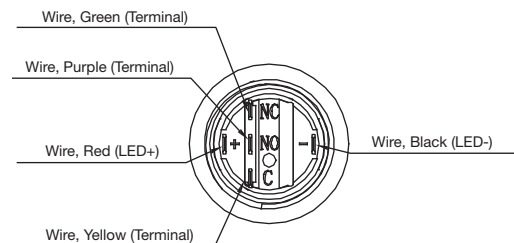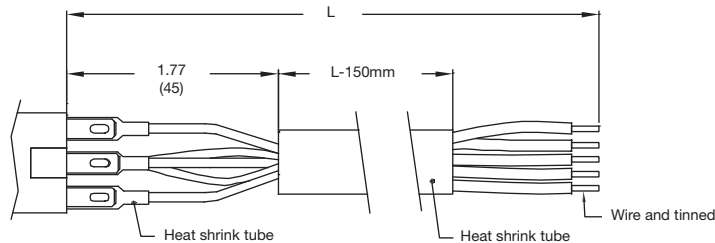

## HARDWARE

**HEX NUT**

Order PN: ATP19-HN

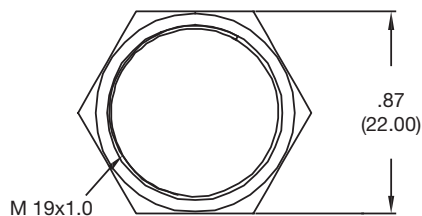

**O RING**

Order PN: ATP19-OR

