


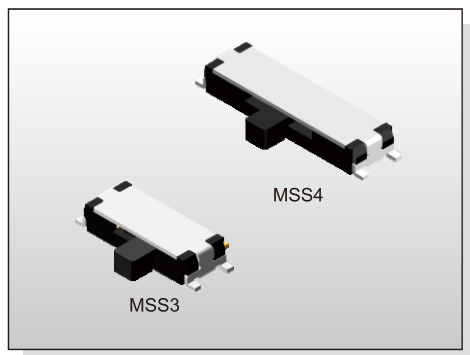

FEATURES

- ※ 1.4mm height
- ※ 1P2T, 1P3T models
- ※ Stroke 1.5mm


APPLICATION

- ※ Remote control
- ※ Consumer electronics
- ※ Instrumentations

SPECIFICATION

Contact Rating	25mA , 24V DC
Contact Resistance	70mΩ max
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	150±100gf (1.47N±0.98N) MSS3 A→B 150±100gf (1.47N±0.98N) C→B 150±100gf (1.47N±0.98N) B→C 200±150gf (1.96N±1.47N) MSS4 B→A 200±150gf (1.96N±1.47N)
Travel	1.5mm
Operating Life	10, 000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C


CIRCUIT

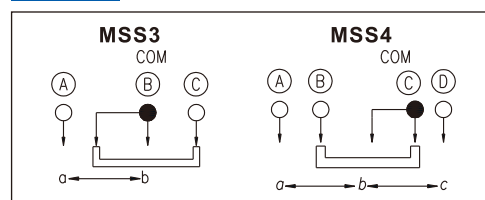



PACKAGE

<Tape & Reel>
2500 pcs

HOW TO ORDER


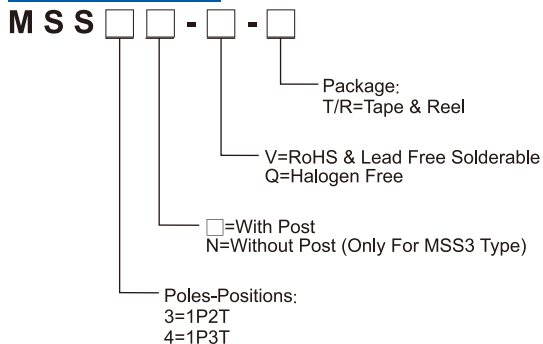


MSS3

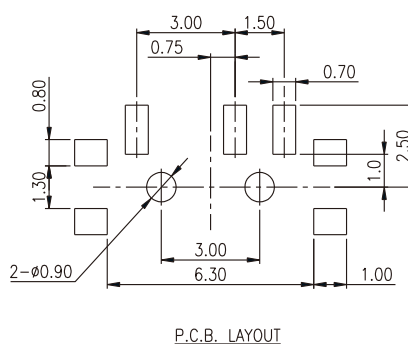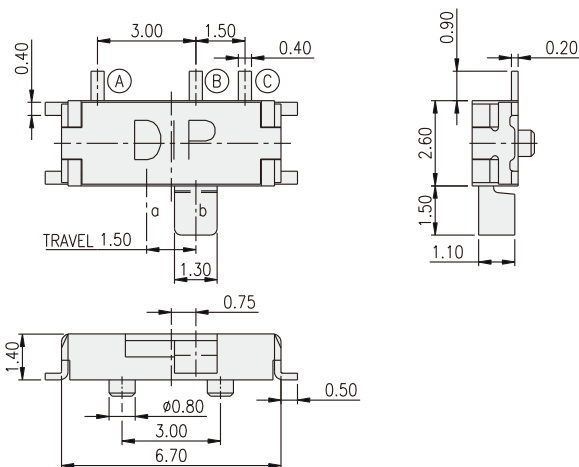

P.C.B. LAYOUT

MSS4

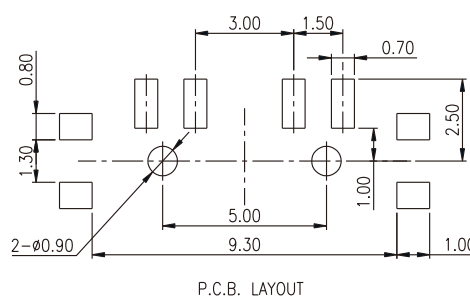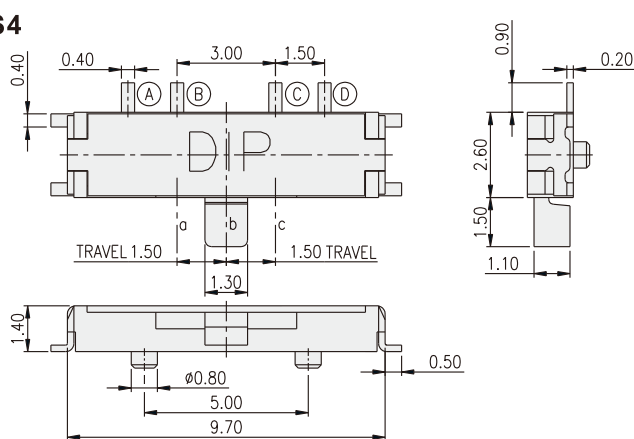

P.C.B. LAYOUT